


U-171 OO

通风管 - 聚氨酯 - 厚度 0,4 mm

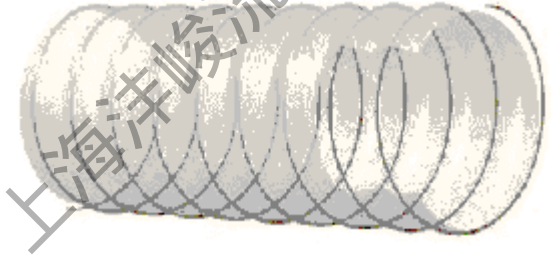

结构: 透明聚氨酯 - 耐磨损、耐臭氧

加强层: 镀铜螺旋钢丝

应用: 抽取空气, 烟尘等气体。也适用于吸取磨料 - 良好的耐油雾性

温度范围: -40 °C +85 °C (-40 °F +185 °F)

Code	ID mm	ID inch	OD mm	Wall mm	Weight g/m	WP bar	WP psi	Vac. %	BR mm	Available Length m	Stock Length m
171OO040001QO0	40	1 9/16			230			20	32	20	20
171OO045001QO0	45	1 3/4			225			30	36	20	20
171OO051001QO0	51	2			290			20	40	20	20
171OO060001QO0	60	2 3/8			340			20	50	20	20
171OO063001QO0	63	2 1/2			350			20	55	20	20
171OO070001QO0	70	2 3/4			420			20	60	20	20
171OO076001QO0	76	3			450			20	65	20	20
171OO080001QO0	80	3 1/8			480			20	65	20	20
171OO090001QO0	90	3 9/16			540			20	75	20	20
171OO102001QO0	102	4			640			15	85	15	15
171OO110001QO0	110	4 5/16			690			15	90	15	15
171OO120001QO0	120	4 3/4			760			10	100	15	15
171OO127001QO0	127	5			800			10	105	15	15
171OO140001QO0	140	5 1/2			960			10	115	15	15
171OO152001QO0	152	6			1040			10	125	15	15
171OO160001QO0	160	6 5/16			1120			10	130	15	15
171OO180001QO0	180	7 1/16			1450			5	150	15	15
171OO203001QO0	203	8			1650			5	165	15	15
171OO254001QO0	254	10			2150			5	210	10	10
171OO305001QO0	305	12			2650			5	250	10	10