


## T-740AA

高压混凝土泵送管 85 bar (1275 psi)

恶劣工况 - 钢丝加强

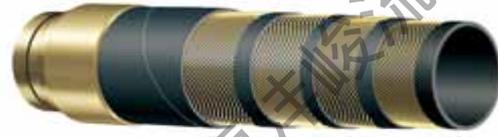

内胶层: 黑色导电 NR - 耐磨损

加强层: 四层高强度钢丝线

外胶层: 黑色导电 SBR/NR - 耐磨损、耐臭氧

应用: 高压混凝土泵送

安全系数: 2:1

温度范围: -30 °C +80 °C (-22 °F +176 °F)

Code	ID mm	ID inch	OD mm	Wall mm	Weight g/m	WP bar	WP psi	Vac. %	BR mm	Available Length m	Stock Length m
740AA0516977N0	51	2	69	9	2130	85	1275		255	15,25/20/61	61
740AA0638577N0	63	2 1/2	85	11	3340	85	1275		265	20/61	61
740AA0760077N0	76	3	100	12	4540	85	1275		380	15,25/20/30,5	20
740AA0901677N0	90	3 9/16	116	13	5490	85	1275		450	20	
740AA1022877N0	102	4	128	13	7020	85	1275		510	15,25/20/30,5	20
740AA1275577N0	127	5	155	14	10340	85	1275		635	15,25/20/30,5	20
740AA1528677N0	152	6	186	17	13780	85	1275		760	20	