


// 720AA

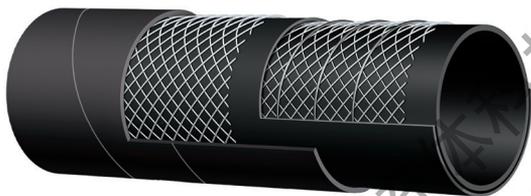

## EVOLUTION

### 散装物料吸排 10 bar (150 psi)

**内胶层:** 黑色导电NR – 耐磨损

**加强层:** 高强度纤维线并嵌有螺旋钢丝

**外胶层:** 黑色导电SBR/NR – 耐磨损、耐臭氧

**应用:** 散装物料吸排, 适合恶劣工况

专为输送干水泥、谷物、动物饲料而设计

**常规运行温度范围:** -30° C +80° C (-22° F +176° F)

↔		↔		⬇	↻	↻		⤴		⬆	⬆	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
51,0	2"	65,00	2,56	10	150	30	450	102	4,02	100	1,430	0,97
63,0	2 1/2"	77,00	3,03	10	150	30	450	189	7,44	90	1,900	1,28
76,0	3"	90,00	3,54	10	150	30	450	228	8,98	90	2,280	1,54
76,0	3"	92,00	3,62	10	150	30	450	228	8,98	90	2,600	1,75
102,0	4"	116,00	4,57	10	150	30	450	306	12,05	90	3,180	2,14
102,0	4"	118,00	4,65	10	150	30	450	306	12,05	90	3,600	2,42
127,0	5"	143,00	5,63	5	75	15	225	508	20,00	80	4,750	3,20
127,0	5"	145,00	5,71	5	75	15	225	508	20,00	80	5,270	3,55
152,0	6"	168,00	6,61	5	75	15	225	608	23,94	80	5,950	4,00