


// 240AA

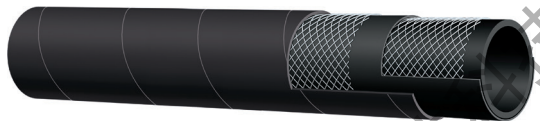

EVOLUTION

空气-水输送 20 bar (300 psi) – FRAS
优于 AS 2660/B

内胶层: 黑色导电SBR/NR

加强层: 高强度纤维线

外胶层: 黑色导电SBR – 耐磨损、耐臭氧和耐火

应用: 地下矿区, 输送空气、水和石粉

常规运行温度范围: -30° C +80° C (-22° F +176° F)

↺		↻		↻		↺		↻		%		♻️	
mm	in	mm	in	bar	psi	bar	psi	mm	in		kg/m	lb/ft	
19,0	3/4"	31,00	1,22	20	300	80	1200	114	4,49		0,560	0,38	
25,0	1"	37,00	1,46	20	300	80	1200	150	5,91		0,720	0,49	
32,0	1 1/4"	46,00	1,81	20	300	80	1200	192	7,56		0,955	0,65	
38,0	1 1/2"	52,00	2,05	20	300	80	1200	228	8,98		1,090	0,74	
51,0	2"	67,00	2,64	20	300	80	1200	306	12,05		1,540	1,04	
63,0	2 1/2"	79,00	3,11	20	300	80	1200	378	14,88		2,160	1,46	
76,0	3"	92,00	3,62	20	300	70	1000	456	17,95		2,500	1,69	
102,0	4"	118,00	4,65	20	300	70	1000	612	24,09		3,370	2,27	