


// 2P1AA

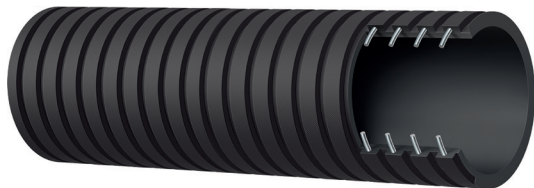

EVOLUTION PLUS

水-泥浆吸排 10 bar (150 psi) -方形波纹状-超柔

内胶层: 黑色合成橡胶

加强层: 高强度纤维线并嵌有螺旋钢丝

外胶层: 黑色合成橡胶 - 耐磨损、耐臭氧

应用: 吸排水。适用于泥浆槽罐车上的超柔软管。

常规运行温度范围: -30° C +80° C (-22° F +176° F)

												
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
51,0	2"	65,00	2,56	10	150	30	450	51	2,01	100	1,440	0,97
76,0	3"	91,00	3,58	10	150	30	450	152	5,98	90	2,490	1,67
102,0	4"	119,00	4,69	10	150	30	450	204	8,03	90	3,510	2,36
152,0	6"	169,00	6,65	10	150	25	375	456	17,95	80	6,430	4,32
203,0	8"	222,00	8,74	10	150	25	375	812	31,97	70	11,040	7,42