


// 223AA

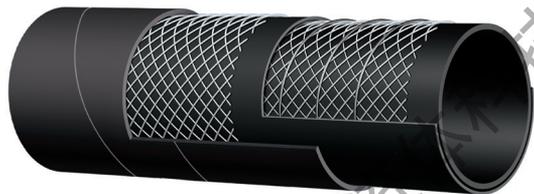

EVOLUTION

吸排水 20 bar (300 psi) – 恶劣工况

内胶层: 黑色导电EPDM

加强层: 高强度纤维线并嵌有螺旋钢丝

外胶层: 黑色导电EPDM – 耐磨损、耐臭氧

应用: 吸排水。适用于恶劣工况

常规运行温度范围: -40° C +100° C (-22° F +212° F)

| ↻ | | ↻ | | ⬇ | | ⬇ | | ⤴ | | Ⓜ | | |
|-------|--------|--------|------|-----|-----|-----|-----|-----|-------|-----|-------|-------|
| mm | in | mm | in | bar | psi | bar | psi | mm | in | % | kg/m | lb/ft |
| 51,0 | 2" | 63,00 | 2,48 | 20 | 300 | 60 | 900 | 153 | 6,02 | 100 | 1,430 | 0,97 |
| 63,0 | 2 1/2" | 77,00 | 3,03 | 20 | 300 | 60 | 900 | 252 | 9,92 | 90 | 2,080 | 1,40 |
| 76,0 | 3" | 90,00 | 3,54 | 20 | 300 | 60 | 900 | 304 | 11,97 | 90 | 2,550 | 1,72 |
| 102,0 | 4" | 116,00 | 4,57 | 20 | 300 | 60 | 900 | 408 | 16,06 | 90 | 3,490 | 2,35 |
| 152,0 | 6" | 172,00 | 6,69 | 20 | 300 | 60 | 900 | 760 | 29,92 | 80 | 8,150 | 5,48 |