


// LIQUID FOOD

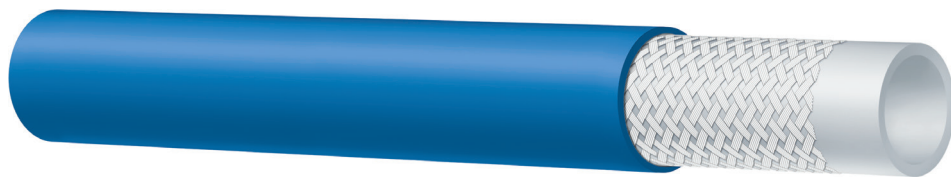

// 450LE EVOLUTION - AGCCLEAN

**Steam 6 bar (90 psi) - Hot water 20 bar (300 psi) - Fat resistant
FDA - ARRÊTÉ DU 05/08/2020 Cat. D - BFR REC. XXI Cat. 2**

Tube: white NBR.

Reinforcement: high tensile textile braid.

Cover: blue NBR/PVC - abrasion, ozone and oil resistant.

Application: saturated steam and hot water wash down in the food and dairy industry.

Resistant to animal and vegetable fats.

Special construction for reeling applications.

Temperature: water -40 °C + 120 °C (-40 °F +248 °F)

steam +165 °C (+330 °F)



IANESCO

EXTRUDED
TUBE

SMOOTH
COVER



ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Weight (kg/m)	Weight (lb/ft)
13,0	1/2"	23,0	0,91	6	90	60	900	65	2,56	0,440	0,30
19,0	3/4"	30,0	1,18	6	90	60	900	95	3,74	0,650	0,44
25,0	1"	36,0	1,42	6	90	60	900	125	4,92	0,820	0,56

上海泮峻流体科技有限公司 - AG授权分销商

TEL: +86-21-58400374/58400394

FAX: +86-21-50182690

E-mail: fengjunfluid@163.com

ADD: 上海市奉贤区浦卫公路6655号一号厂房

<https://tiger-flex.com.cn/>