


// 400LE **NEW**

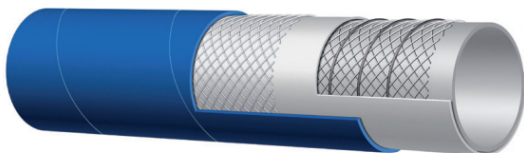

EVOLUTION

多用途食品吸排 10 bar (150 psi)

FDA – D.M. 21/03/73

内胶层: 白色NBR

加强层: 高强度纤维线并嵌有螺旋钢丝

外胶层: 蓝色NR/EPDM – 耐磨损、耐臭氧

应用: 液态食品、脂肪类食品和酒精度不超过75%的酒精饮品的吸排。超柔的特殊结构。

用130° C (266° F) 水蒸汽消毒30分钟或用5%的苏打水消毒

常规运行温度范围: -30° C +110° C (-22° F +230° F)

				 								
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
25,0	1"	36,00	1,42	10	150	30	450	50	1,97	100	0,690	0,47
32,0	1 1/4"	43,00	1,69	10	150	30	450	64	2,52	100	0,840	0,57
38,0	1 1/2"	49,00	1,93	10	150	30	450	76	2,99	100	0,980	0,66
51,0	2"	63,00	2,48	10	150	30	450	102	4,02	100	1,270	0,86
63,0	2 1/2"	76,00	2,99	10	150	30	450	126	4,96	90	2,020	1,37
76,0	3"	89,00	3,50	10	150	30	450	152	5,98	90	2,400	1,62
102,0	4"	116,00	4,47	10	150	30	450	204	8,03	90	3,380	2,28