



An Indo - Japan Joint Venture

METAL HOSE & ASSEMBLIES

INDEX

ID. NO	CONTENT	Page No
	ABOUT POLYHOSE GROUP	3
	CERTIFICATION	4
1	1.1 ANNULARLY CORRUGATED HOSE	5
	1.2 STRIPWOUND HOSE	6
	1.3 PRODUCT NOMENCLATURE (ANNULAR HOSE)	7
	PRODUCT SPECIFICATION	
	1.4 PH 2000 MFM	8-9
	1.5 PH 2100 MFMS	10-11
	1.6 PH 2200 MFH	12-13
	1.7 PH 2300 HFH	14-15
	1.8 PH 2400 HFM	16-17
	1.9 PH 2500 HMH	18-19
	1.11 PH 2600 W	20
	1.12 PH 2700 OW	21
	1.13 PRODUCT NOMENCLATURE (STRIPWOUND HOSE)	22
	1.14 DOUBLE INTERLOCK (POLYGONAL)	23
	1.15 DOUBLE INTERLOCK (CIRCULAR)	24-25
	1.16 SQUARE LOCK	26
2	END FITTING	
	2.1 END FITTING PRODUCT NOMENCLATURE	27
	2.2 END FITTING	27-28
3	3.1 ASSEMBLED HOSE	29
	3.2 S.T.A.M.P.E.D.	30
	3.3 PRODUCT NOMENCLATURE (HOSE ASSEMBLY)	31
	3.4 PUMP CONNECTOR	32
	3.5 NON-WELDED HOSE ASSEMBLY	33
4	SPECIAL HOSE	
	4.1 ARMOR & LINER	33

ID. NO	CONTENT	Page No
	4.2 PCSCH (TPV)	34
	4.3 JACKETED HOSE	35
	4.4 LANCE HOSE	35
	4.5 SOLAR HOSE	36-37
	4.6 FLEXIBLE METALLIC ELECTRICAL CONDUIT	38
5	TESTING & QUALITY	
	5.1 ISO 10380	39
	5.2 TESTING	40
6	PACKING	41
7	GLOSSARY	
	7.1 TEMP CORRECTION FACTOR	42
	7.2 CORROSION RESISTANCE	43-44
	7.3 PRESSURE DROP CHART	45
	7.4 INSTALLATION CONDITION	45
	7.5 DESIGN CALCULATION & INSTALLATION	46
	7.6 FLOW VELOCITY	47
	7.7 LIVE HOSE LENGTH BENDING TABLE	48
8	8.1 TERMINOLOGY	49-51



About us

Established in 2016 with the keen vision of establishing Polyhose India Pvt. Ltd. as a one-stop solution for all energy conveyance needs, Polyhose Tofle Pvt. Ltd. is a Joint Venture with the Japanese company Tofle Co. Ltd., which is the world's leading manufacturer of Stainless-Steel Hoses and Bellows with 50+ years' experience in manufacturing of metal hoses. The Factory houses state-of-the-art and latest machinery imported from Europe. Set up on a sprawling 20 Acre land. Our vision is to be the world's leading manufacturers and exporters of Stainless-Steel Hoses and Bellows. The factory manufactures Metal Hoses from ¼" to 12" in diameter.

上海沅峻流体科技有限公司 - AG授权分销商

TEL:+86-21-58400374/58400394

FAX:+86-21-50182690

E-mail:fengjunfluid@163.com

ADD:上海市奉贤区浦卫公路6655号一号厂房

<https://tiger-flex.com.cn/>

CERTIFICATION



CERTIFICATE

**Quality management system
welding manufacturer**
according to Directive 2014/68/EU, Annex I, point 3.1

Certificate no.: 07/203/1409/HZ/4380/22

Name and address of manufacturer: POLYHOSE TOFLE PVT. LTD.,
1/160, No: 25 Kannivakkam Village, Guduvanchery
Chengalpet (Tk), Kancheepuram Dist-602303
Tamilnadu, India

This is to certify that the manufacturer applies a quality management system with relation to the welding technology. The manufacturer has demonstrated that the welding requirements for the manufacturing of pressure equipment are fulfilled.

Verified: According to Directive 2014/68/EU, Annex I, point 3.1

Audit report no.: 812 059 7646, SAP No. 812 084 2558

Scope: Stainless Steel Flexible Corrugated Hoses and Hose Assemblies with or without Braid, Size Range: 1/4" to 10" ID (DN 6 to DN 250) in acc. With DIN EN ISO 10380:2013-02

This certificate is valid until: July 2025



Essen, 13.07.2022


Niekamp

TÜV NORD Systems GmbH & Co. KG,
Düster-Platzstraße 31, D-42699 Solingen

Print Center:
Conventio: Power Plant
Am TLZ 1
46091 Essen

Phone: +49 (0) 201 825-9722
Fax: +49 (0) 201 825-2558
E-Mail: niekamp@tuv-nord.de

029000201409/1409/HZ/4380/22



CERTIFICATE

TÜV NORD Systems GmbH & Co. KG
certifies that the company

POLYHOSE TOFLE PVT LTD.,
1/160, No:25 Kannivakkam Village, Guduvanchery
Chengalpet(Tk), Kancheepuram Dist-602303,
Tamilnadu,INDIA

has been verified and recognized
as manufacturer of

**STAINLESS STEEL FLEXIBLE CORRUGATED HOSES and HOSE ASSEMBLIES
WITH OR WITHOUT BRAID FOR PRESSURE EQUIPMENTS**
Size range : 1/4" to 10" ID (DN 6 to DN 250)
In Accordance with DIN EN ISO 10380:2013-02

according to the rules of
AD 2000-Merkblatt HP0
Certificate-No.: 07/203/1409/HP/4380/22
The range of validity and details of the inspection can be taken from our
Report No. 812 059 7646 / SAP-No.: 812 084 2558

The company has introduced a product-related quality system together with personnel and equipment which assures manufacturing and testing to conforming to the technical rules.

This certificate is valid until
JULY 2025



Essen, 13.07.2022


Niekamp

TÜV NORD Systems GmbH & Co. KG,
Düster-Platzstraße 31, D-42699 Solingen

Region: Conventio: Power Plant
Am TLZ 1
46091 Essen

Tel: +49 (0) 201 825-9722
Fax: +49 (0) 201 825-2558
E-Mail: niekamp@tuv-nord.de

STAINLESS STEEL FLEXIBLE CORRUGATED HOSES and HOSE ASSEMBLIES WITH OR WITHOUT BRAID FOR PRESSURE EQUIPMENTS

ZERTIFIKAT ♦ CERTIFICATE ♦ 認証証書 ♦ CERTIFICADO ♦ CERTIFICAT



CERTIFICATE

The Certification Body
of TÜV SÜD South Asia Private Limited
certifies that

POLYHOSE TOFLE PVT. LTD.
1/160, Kannivakkam Village, Guduvanchery,
Chengalpetu (TK), Kancheepuram - 603 202, Tamilnadu, INDIA

has implemented Quality Management System
in accordance with ISO 9001:2015
for the scope of

Manufacture of SS flexible hose, SS braids and metal hose assemblies.

The certificate is valid from **2021-08-13** until **2024-08-12**
Subject to successful completion of annual periodic audits
The period of validity of this Certificate can be extended online www.tuv-sud.com/india
Further comments regarding the scope of this certificate may be obtained by consulting the certification body

Certificate Registration No. **99 100 18838**
Date of Initial certification: **2018-08-13**
Issue Date: **2021-07-28** Rev. 00


Rohit K. Sin
Head of Certification Body
of TÜV SÜD South Asia Private Limited, Mumbai
Member of TÜV SÜD Group






TÜV SÜD South Asia Pvt Ltd • TÜV SÜD House • 2nd Floor • Archer Road • Marol • 400072 • Maharashtra • INDIA

1.1 ANNULAR CORRUGATED HOSE

Metal Hose

Hoses can be used to convey most kinds of fluids, gases and liquids, chemicals, etc., and can function to absorb reciprocating motion, thermal expansion, vibration, and misalignment.

Actually for in High temperature or pressure, while remaining flexible.

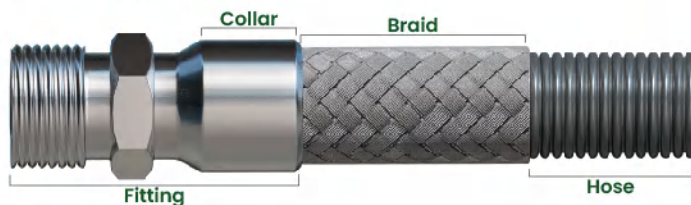

Types:

Corrugated Hose & Stripwound Hose

Corrugated Hose:

Types of Profile: Annular & Helical


Annular:

Hose is formed from tubing into individual parallel corrugations

Helical:

Hose is also formed from tubing, but into a continuous spiral corrugation.

Annularly Corrugated Hose:

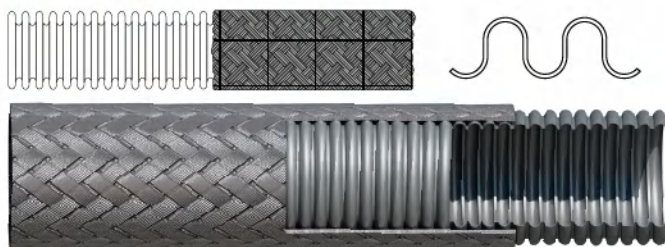


Mechanical Forming

Size: 1/4" to 4"

Material: SS304, SS316L & SS321

A Longitudinal Weld Tube is fed into the corrugator, a ring rolls around it, creating slight indentations at regular intervals. The ring has a smooth radius to minimize stress concentrations. The intervals will become valleys between the corrugations

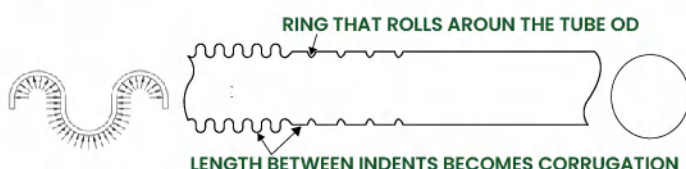


Hydro Forming

Size: 1.1/4" to 12"

Material: SS304, SS316L & SS321

In hydro forming, the force used to push the metal outward to form the corrugation is generated by water. The water pressure from inside the tube pushes the metal into a die on the outside of the tube which gives the bump its shape. Hydro forming may be used to form the corrugations individually, or in a group of several humps all at once in a multi-station form

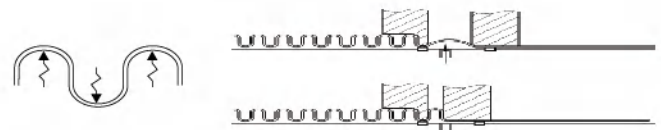

Braid:

Wire Dia: From 0.3mm to 0.7mm

Braiding Material : SS304L & SS316L

Braid Coverage: 90 to 95%

Temp Range: -200°C to 550°C (Applicable for hose)



Wall Thickness:

From-0.15mm to 0.7mm (Applicable for hose)

Safety Factor: 4:1

Temp Range: -600°C to 550°C

1.2 STRIPWOUND HOSE:

Stripwound Metal Hose is a flexible metal hose that is ideal for the transfer of abrasive materials. Although it is not gas tight, like corrugated hose, it is durable and an excellent choice for use as a guard, an open-ended exhaust hose, and for the transfer of dry bulk materials.

It is also used in some water & wastewater treatment applications. One of the main benefits of stripwound hose is its ability to not contaminate the transferred product with any residue.

Material: SS304

End Fitting: As per customer requirement.



Double Interlock

Strip is formed with legs that interlock to form a tighter, more rugged construction.

Features & Benefits:

Extremely flexible. Ideally suited for conveying dry, bulk materials, for open-end gas exhaust, and as a protective cover.



Squarelock

The strip is formed into square shapes that are locked together.


Features & Benefits:

Extremely flexible. Primarily used as a protective covering for wires, fiberoptic cables, and other hoses.




Profile

CIRCULAR CROSS SECTION

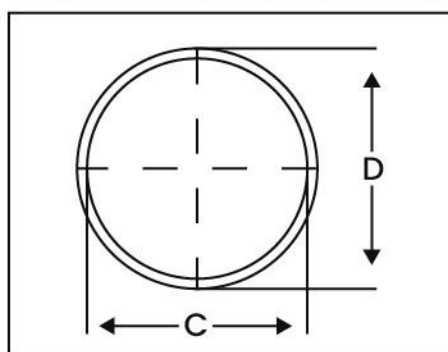

POLYGONAL CROSS SECTION

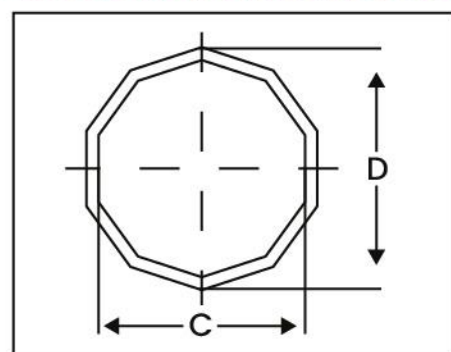

1.3 PRODUCT NOMENCLATURE (Annular Hose)

R	006	MFM	X	R	1	0	K	
								Grade of Tube: R - SS 304 G - SS 316L B - SS 321 W - Loose Braid without tube (med.weight) OW - Loose Braid without tube (high weight)
								ID of Tube: 6.3mm ID DN 6 - 006 6.3mm ID DN 8 - 008 and so on...
								Manufacturing Series: MFM - Mechanical Forming Medium Flexibility MFM (S) - Mechanical Forming Medium Flexibility Special MFM - Mechanical Forming High Flexibility HFH - Heavy Duty Hose HFM - Hydro Forming Medium Flexibility HFM - Hydro Forming Heavy Duty W - Medium Weight with Medium Coverage OW - High Weight with High Coverage
								Number of Weld: X - None
								Grade of Braid: R - SS 304L G - SS 316L B - SS 321 0 - None
								Number of Braid: 0 - No Braids 1 - 1 Braid 2 - 2 Braids 3 - 3 Braids
								Version: 0 - Standard 1 - Special Wire
								Length of Hose: K - 15m Q - 25m P - 20m T - 50m Z - Random

上海沅峻流体科技有限公司 - AG授权分销商

TEL: +86-21-58400374/58400394

FAX: +86-21-50182690

E-mail: fengjunfluid@163.com


ADD: 上海市奉贤区浦卫公路6655号一号厂房

<https://tiger-flex.com.cn/>



1.4 PH 2000 SERIES – MFM

- Structure** : Annular Corrugated Mechanical formed flexible metal hoses produced from longitudinally welded tubes with or without braiding
- Characteristics** : Light Weight / Medium Flexibility
- Standards** : EN ISO 10380
- Hose Material** : Stainless Steel AISI 304, AISI 321, AISI 316L
- Braiding Material** : Stainless Steel AISI 304L and AISI 316L
- Suitable fittings types** : Threaded end, Flange end, Pipe end, etc. as per customer specifications

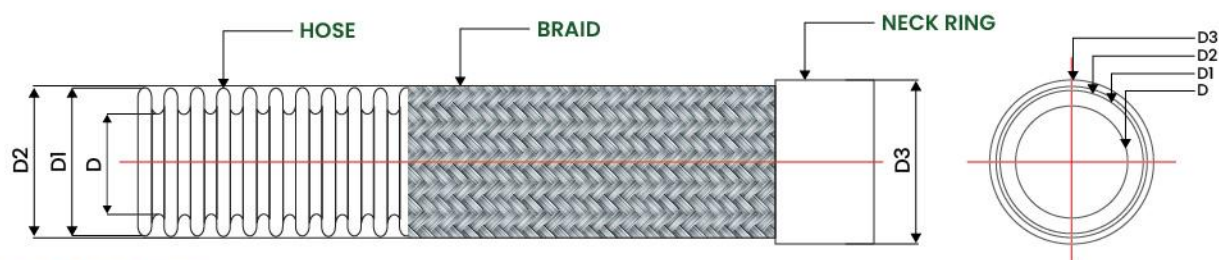

METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID							
				COVERAGE	(D)	(D1 & D2)	(Max) @20°C	(Min) @20°C	DYNAMIC	STATIC	WEIGHT
				%	mm	mm	bar	bar	mm	mm	kg/m
1/4"	R006MFMX00T	0	24 X 4 X 0.3	94	6.30	9.60	5	--	--	--	0.07
	R006MFMXRIT	1			6.30	10.80	120	480	110.00	25.00	0.15
	R006MFMXR2T	2			6.30	12.00	180	720	--	--	0.22
5/16"	R008MFMX00T	0	24 X 5 X 0.3	92	8.50	12.10	5	--	--	--	0.09
	R008MFMXRIT	1			8.50	13.60	112	448	130.00	32.00	0.18
	R008MFMXR2T	2			8.50	14.80	168	672	--	--	0.27
3/8"	R010MFMX00T	0	24 X 6 X 0.3	92	10.00	14.10	5	--	--	--	0.10
	R010MFMXRIT	1			10.00	15.70	97	388	150.00	38.00	0.22
	R010MFMXR2T	2			10.00	16.90	145.5	582	--	--	0.34
1/2"	R012MFMX00T	0	24 X 7 X 0.3	92	12.10	16.70	4.5	--	--	--	0.11
	R012MFMXRIT	1			12.10	18.20	75	300	165.00	45.00	0.25
	R012MFMXR2T	2			12.10	19.40	112.5	450	--	--	0.39

5/8"	R016MFMX00T	0	36 X 7 X 0.3	96	16.60	21.90	4.5	--	--	--	0.18
	R016MFMXRIT	1			16.60	23.50	60	240	195.00	58.00	0.38
	R016MFMXR2T	2			16.60	24.70	90	360	--	--	0.57
3/4"	R020MFMX00T	0	36 X 9 X 0.3	94	20.20	26.70	3	--	--	--	0.27
	R020MFMXRIT	1			20.20	28.20	60	240	225.00	70.00	0.53
	R020MFMXR2T	2			20.20	29.40	90	360	--	--	0.78
1"	R025MFMX00T	0	36 X 10 X 0.3	96	25.30	32.30	3	--	--	--	0.36
	R025MFMXRIT	1			25.30	33.80	50	200	260.00	85.00	0.62
	R025MFMXR2T	2			25.30	35.00	75	300	--	--	0.88
1 1/4"	R032MFMX00P	0	48 X 8 X 0.4	94	33.60	41.20	3	--	--	--	0.54
	R032MFMXRIP	1			33.60	43.00	46	184	300.00	105.00	1.04
	R032MFMXR2P	2			33.60	44.60	69	276	--	--	1.55
1 1/2"	R040MFMX00P	0	48 X 9 X 0.4	92	40.00	49.50	2	--	--	--	0.70
	R040MFMXRIP	1			40.00	51.30	42	168	340.00	130.00	1.28
	R040MFMXR2P	2			40.00	52.90	63	252	--	--	1.86
2"	R050MFMX00P	0	48 X 10 X 0.4	96	50.40	60.70	2	--	--	--	0.88
	R050MFMXRIP	1			50.40	62.60	32	128	390.00	160.00	1.51
	R050MFMXR2P	2			50.40	64.20	48	192	--	--	2.14

Note:

1. Test pressure is 1.5 times of working pressure @ 20°C
2. This information is for guidance only, we reserve the right to alter or amend specifications as deemed necessary.
3. General tolerance is applicable.

上海沅峻流体科技有限公司 - AG授权分销商

TEL: +86-21-58400374/58400394

FAX: +86-21-50182690

E-mail: fengjunfluid@163.com


ADD: 上海市奉贤区浦卫公路6655号一号厂房

<https://tiger-flex.com.cn/>



1.5 PH 2100 SERIES-MFM SPECIAL

- Structure** : Annular Corrugated Mechanical formed flexible metal hoses produced from longitudinally welded tubes with or without braiding
- Characteristics** : Light Weight / Medium Flexibility
- Standards** : EN ISO 10380
- Hose Material** : Stainless Steel AISI 304, AISI 321, AISI 316L
- Braiding Material** : Stainless Steel AISI 304L and AISI 316L
- Suitable fittings types** : Threaded end, Flange end, Pipe end, etc. as per customer specifications

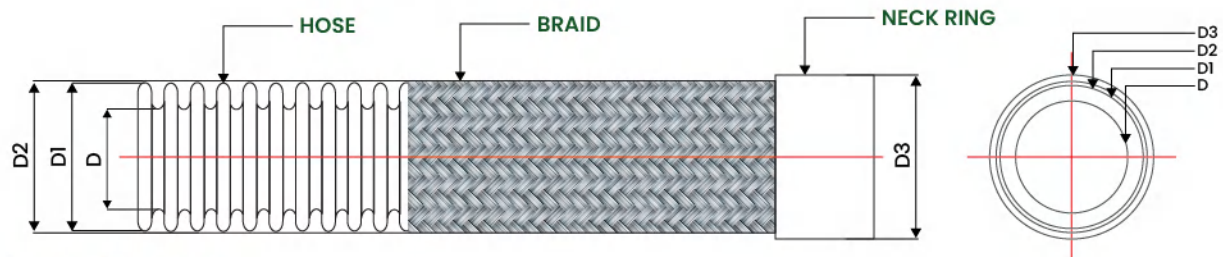

METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID							
				COVERAGE	ID	OD	WP	BP	DYNAMIC	STATIC	WEIGHT
				%	(D) mm	(D1 & D2) mm	(Max) @20°C bar	(Min) @20°C bar			
1/4"	R006MFMS00T	0	24 X 5 X 0.3	94	6.30	9.60	5	---	---	---	0.08
	R006MFMSR1T	1			6.30	10.80	162	648	110	25	0.16
	R006MFMSR2T	2			6.30	12.00	194.4	778	---	---	0.24
5/16"	R008MFMS00T	0	24 X 6 X 0.3	92	8.50	12.10	5	---	---	---	0.09
	R008MFMSR1T	1			8.50	13.60	114	456	130	32	0.20
	R008MFMSR2T	2			8.50	14.80	137	547	---	---	0.30
3/8"	R010MFMS00T	0	24 X 7 X 0.3	92	10.00	14.10	5	---	---	---	0.10
	R010MFMSR1T	1			10.00	15.70	110	440	150	38	0.22
	R010MFMSR2T	2			10.00	16.90	132	528	---	---	0.34
1/2"	R012MFMS00T	0	24 X 8 X 0.3	92	12.10	16.70	4.5	---	---	---	0.11
	R012MFMSR1T	1			12.10	18.20	89	356	165	45	0.25
	R012MFMSR2T	2			12.10	19.40	107	427	---	---	0.39

5/8"	R016MFMS00T	0	36 X 8 X 0.3	96	16.60	21.90	4.5	---	---	---	0.18
	R016MFMSR1T	1			16.60	23.50	80	320	195	58	0.40
	R016MFMSR2T	2			16.60	24.70	96	384	---	---	0.61
3/4"	R020MFMS00T	0	36 X 9 X 0.3	94	20.20	26.70	3	---	---	---	0.27
	R020MFMSR1T	1			20.20	28.20	70	280	225	70	0.53
	R020MFMSR2T	2			20.20	29.40	84	336	---	---	0.78
1"	R025MFMS00T	0	36 X 9 X 0.4	96	25.30	32.30	3	---	---	---	0.36
	R025MFMSR1T	1			25.30	34.20	58	232	260	85	0.76
	R025MFMSR2T	2			25.30	35.40	70	278	---	---	1.16
1 1/4"	R032MFMS00P	0	48 X 8 X 0.4	94	33.60	41.20	3	---	---	---	0.54
	R032MFMSR1P	1			33.60	43.00	46	184	300	105	1.04
	R032MFMSR2P	2			33.60	44.60	56	224	---	---	1.55
1 1/2"	R040MFMS00P	0	48 X 9 X 0.4	92	40.00	49.50	2	---	---	---	0.70
	R040MFMSR1P	1			40.00	51.30	42	168	340	130	1.32
	R040MFMSR2P	2			40.00	52.90	52	208	---	---	1.94
2"	R050MFMS00P	0	48 X 9 X 0.5	96	50.40	60.70	2	---	---	---	0.88
	R050MFMSR1P	1			50.40	63.00	38	152	390	160	1.78
	R050MFMSR2P	2			50.40	64.60	48	192	---	---	2.68


Note:

1. Test pressure is 1.5 times of working pressure @ 20°C
2. This information is for guidance only, we reserve the right to alter or amend specifications as deemed necessary.
3. General tolerance is applicable.



1.6 PH 2200 SERIES-MFH

- Structure** : Annular Corrugated Mechanical formed flexible metal hoses produced from longitudinally welded tubes with or without braiding
- Characteristics** : Medium Weight / High Flexibility
- Standards** : EN ISO 10380
- Hose Material** : Stainless Steel AISI 304, AISI 321, AISI 316L
- Braiding Material** : Stainless Steel AISI 304L and AISI 316L
- Suitable fittings types** : Threaded end, Flange end Pipe, etc. as per customer specifications

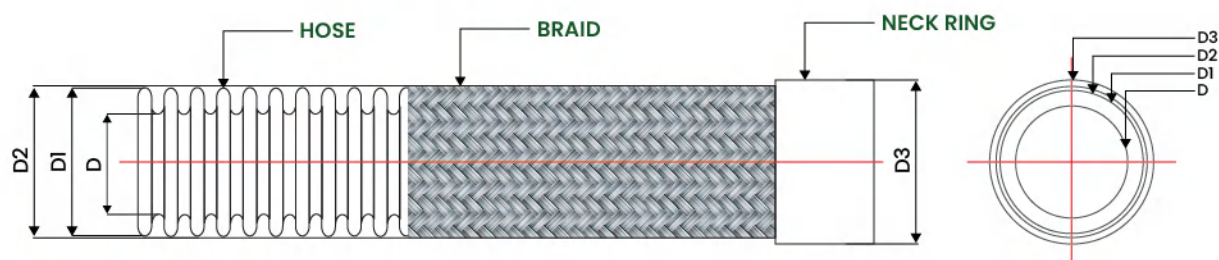

METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID							
				COVERAGE	ID	OD	WP	BP	DYNAMIC	STATIC	WEIGHT
				%	(D) mm	(D1 & D2) mm	(Max) @20°C bar	(Min) @20°C bar	mm	mm	kg/m
1/4"	R006MFHX00T	0	24 X 5 X 0.3	95	6.30	9.60	5	--	--	--	0.11
	R006MFHXRIT	1			6.30	10.80	120	480	77.00	25.00	0.19
	R006MFHXR2T	2			6.30	12.00	180	720	--	--	0.26
5/16"	R008MFHX00T	0	24 X 6 X 0.3	92	8.50	12.10	5	--	--	--	0.15
	R008MFHXRIT	1			8.50	13.60	112	448	91.00	32.00	0.25
	R008MFHXR2T	2			8.50	14.80	168	672	--	--	0.35
3/8"	R010MFHX00T	0	24 X 7 X 0.3	93	10.00	14.10	5	--	--	--	0.16
	R010MFHXRIT	1			10.00	15.70	97	388	105.00	38.00	0.29
	R010MFHXR2T	2			10.00	16.90	145.5	582	--	--	0.40
1/2"	R012MFHX00T	0	24 X 8 X 0.3	92	12.10	16.70	4.5	--	--	--	0.17
	R012MFHXRIT	1			12.10	18.20	75	300	116.00	45.00	0.31
	R012MFHXR2T	2			12.10	19.40	112.5	450	--	--	0.45

5/8"	R016MFHX00T	0	36 X 8 X 0.3	93	16.60	21.90	4.5	--	--	--	0.30
	R016MFHXRIT	1			16.60	23.50	60	240	136.00	58.00	0.51
	R016MFHXR2T	2			16.60	24.70	90	360	--	--	0.72
3/4"	R020MFHX00T	0	36 X 9 X 0.3	96	20.20	26.70	3	--	--	--	0.44
	R020MFHXRIT	1			20.20	28.20	60	240	158.00	70.00	0.69
	R020MFHXR2T	2			20.20	29.40	90	360	--	--	0.95
1"	R025MFHX00T	0	36 X 9 X 0.4	95	25.30	32.30	3	--	--	--	0.58
	R025MFHXRIT	1			25.30	34.20	50	200	182.00	85.00	0.99
	R025MFHXR2T	2			25.30	35.80	75	300	--	--	1.39
1 1/4"	R032MFHX00P	0	48 X 8 X 0.4	95	33.60	41.20	3	--	--	--	0.76
	R032MFHXRIP	1			33.60	43.00	46	184	210.00	105.00	1.25
	R032MFHXR2P	2			33.60	44.60	69	276	--	--	1.75
1 1/2"	R040MFHX00P	0	48 X 9 X 0.4	94	40.00	49.50	1.9	--	--	--	0.98
	R040MFHXRIP	1			40.00	51.30	42	168	238.00	130.00	1.56
	R040MFHXR2P	2			40.00	52.90	63	252	--	--	2.13
2"	R050MFHX00P	0	48 X 9 X 0.5	94	50.40	60.70	1.9	--	--	--	1.23
	R050MFHXRIP	1			50.40	63.00	32	128	273.00	160.00	2.13
	R050MFHXR2P	2			50.40	65.00	48	192	--	--	3.03
2 1/2"	R065MFHX00P	0	72 X 7 X 0.5	95	62.80	76.30	1	--	--	--	1.21
	R065MFHXRIP	1			62.80	78.90	30	120	460.00	200.00	2.35
	R065MFHXR2P	2			62.80	80.90	36	144	--	--	3.49
3"	R080MFHX00P	0	72 X 9 X 0.5	93	78.70	94.50	1	--	--	--	1.89
	R080MFHXRIP	1			78.70	97.10	25	100	660.00	240.00	3.19
	R080MFHXR2P	2			78.70	99.10	30	120	--	--	4.49
4"	R100MFHX00P	0	72 X 10 X 0.5	88	97.80	114.20	1	--	--	--	2.60
	R100MFHXRIP	1			97.80	116.70	19	76	750.00	290.00	4.00
	R100MFHXR2P	2			97.80	118.70	23	91.2	--	--	5.40


Note:

1. Test pressure is 1.5 times of working pressure @ 20°C
2. This information is for guidance only, we reserve the right to alter or amend specifications as deemed necessary.
3. General tolerance is applicable.



1.7 PH 2300 SERIES-HFH

- Structure** : Annular Corrugated Mechanical / Hydroformed flexible metal hoses produced from longitudinally welded tubes with or without braiding
- Characteristics** : Heavy Weight / Flexible Hose
- Standards** : EN ISO 10380
- Hose Material** : Stainless Steel AISI 304, AISI 321, AISI 316L
- Braiding Material** : Stainless Steel AISI 304L and AISI 316L
- Suitable fittings types** : Threaded end, Flange end, Pipe end, etc. as per customer specifications

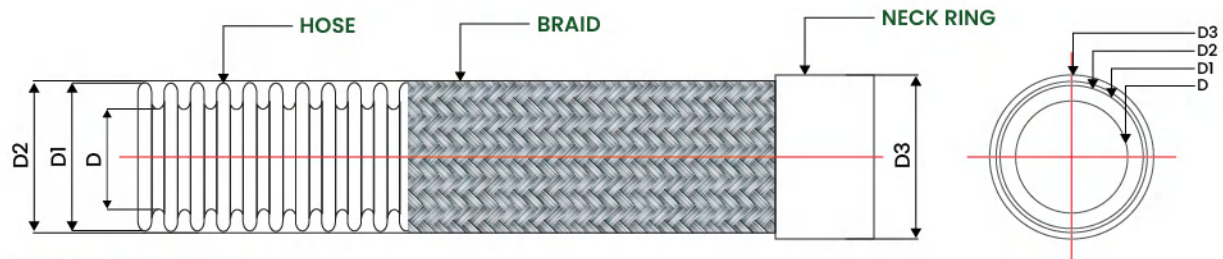


METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID							
				COVERAGE	ID	OD	WP	BP	DYNAMIC	STATIC	WEIGHT
				%	(D) mm	(D1 & D2) mm	(Max) @20°C bar	(Min) @20°C bar			
1/4"	R006HFHX00K	0	24 X 5 X 0.35	98	6.00	10.10	13.8	--	--	--	0.12
	R006HFHXRIK	1			6.00	12.20	172	688	125.00	26.00	0.26
	R006HFHXR2K	2			6.00	13.60	258	1032			0.39
5/16"	R008HFHX00K	0	24 X 6 X 0.35	98	7.60	12.20	12.4	--	--	--	0.17
	R008HFHXRIK	1			7.60	14.50	160	640	125.00	26.00	0.31
	R008HFHXR2K	2			7.60	15.90	240	960			0.44
3/8"	R010HFHX00K	0	24 X 8 X 0.35	98	11.00	16.20	6.9	--	--	--	0.18
	R010HFHXRIK	1			11.00	18.00	120	480	140.00	32.00	0.39
	R010HFHXR2K	2			11.00	19.40	180	720			0.60
1/2"	R012HFHX00K	0	24 X 9 X 0.35	94	14.50	21.10	5.5	--	--	--	0.32
	R012HFHXRIK	1			14.50	22.90	85	340	155.00	40.00	0.55
	R012HFHXR2K	2			14.50	24.30	127.5	510			0.78

3/4"	R020HFHX00K	0	36 X 9 X 0.35	95	20.60	30.70	4.8	--	--	--	0.64
	R020HFHXRIK	1			20.60	32.50	65	260	205.00	58.00	0.96
	R020HFHXR2K	2			20.60	33.90	97.5	390	--	--	1.28
1"	R025HFHX00K	0	36 X 10 X 0.35	92	27.30	38.50	2.8	--	--	--	0.80
	R025HFHXRIK	1			27.30	40.30	50	200	230.00	70.00	1.17
	R025HFHXR2K	2			27.30	41.70	75	300	--	--	1.54
1 1/4"	R032HFHX00K	0	48 X 9 X 0.4	95	31.60	45.00	1.7	--	--	--	0.94
	R032HFHXRIK	1			31.60	46.60	42	168	270.00	90.00	1.49
	R032HFHXR2K	2			31.60	48.20	63	252	--	--	2.05
1 1/2"	R040HFHX00K	0	48 X 10 X 0.4	95	40.30	55.00	1.4	--	--	--	1.13
	R040HFHXRIK	1			40.30	56.60	38	152	310.00	100.00	1.75
	R040HFHXR2K	2			40.30	58.20	57	228	--	--	2.37
2"	R050HFHX00K	0	48 X 10 X 0.5	95	49.50	65.00	1	--	--	--	1.46
	R050HFHXRIK	1			49.50	67.00	37	148	390.00	130.00	2.46
	R050HFHXR2K	2			49.50	69.00	56	222	--	--	3.46
2 1/2"	R065HFHX00K	0	72 X 8 X 0.5	94	64.80	83.00	0.8	--	--	--	1.59
	R065HFHXRIK	1			64.80	85.00	34	136	460.00	200.00	2.76
	R065HFHXR2K	2			64.80	87.00	51	204	--	--	3.94
3"	R080HFHX00K	0	72 X 9 X 0.5	96	79.80	97.50	0.7	--	--	--	1.78
	R080HFHXRIK	1			79.80	100.00	27	108	570.00	230.00	3.09
	R080HFHXR2K	2			79.80	102.00	40.5	162	--	--	4.39
4"	R100HFHX00K	0	72 X 11 X 0.5	96	99.80	120.00	0.6	--	--	--	2.50
	R100HFHXRIK	1			99.80	122.50	20	80	690.00	330.00	4.10
	R100HFHXR2K	2			99.80	124.50	30	120	--	--	5.69
5"	R125HFHX00K	0	72 X 11 X 0.7	93	130.00	154.00	0.4	--	--	--	3.60
	R125HFHXRIK	1			130.00	157.00	16	64	1000.00	350.00	6.72
	R125HFHXR2K	2			130.00	159.80	24	96	--	--	9.84
6"	R150HFHX00K	0	72 X 12 X 0.7	90	154.00	180.00	0.3	--	--	--	5.70
	R150HFHXRIK	1			154.00	183.00	12	48	1250.00	400.00	9.10
	R150HFHXR2K	2			154.00	185.80	18	72	--	--	12.50
8"	R200HFHX00K	0	96 X 9 X 0.7	90	204.00	233.00	0.3	--	--	--	8.40
	R200HFHXRIK	1			204.00	237.00	9	36	1600.00	520.00	12.45
	R200HFHXR2K	2			204.00	239.80	14	54	--	--	16.50
10"	R250HFHX00K	0	96 X 12 X 0.7	90	254.00	282.00	0.2	--	--	--	10.50
	R250HFHXRIK	1			254.00	287.00	7	28	2000.00	620.00	16.15
	R250HFHXR2K	2			254.00	289.80	10.5	42	--	--	21.81


Note:

1. Test pressure is 1.5 times of working pressure @ 20°C
2. This information is for guidance only, we reserve the right to alter or amend specifications as deemed necessary.
3. General tolerance is applicable.

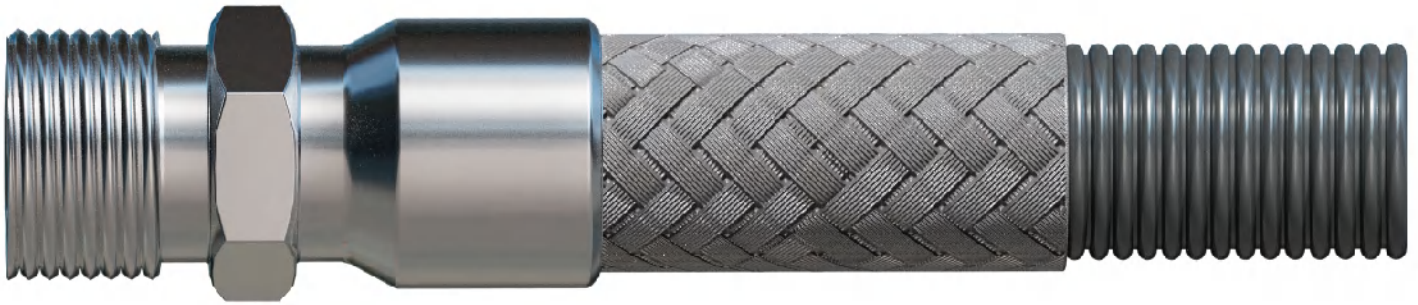

1.8 PH 2400 SERIES – HFM

- Structure** : Annular Corrugated Hydroformed flexible metal hoses produced from longitudinally welded tubes with or without braiding
- Characteristics** : Light Weight / Medium Flexibility
- Standards** : EN ISO 10380
- Hose Material** : Stainless Steel AISI 304, AISI 321, AISI 316L
- Braiding Material** : Stainless Steel AISI 304L and AISI 316L
- Suitable fittings types** : Threaded end, Flange end, Pipe end, etc. as per customer specifications

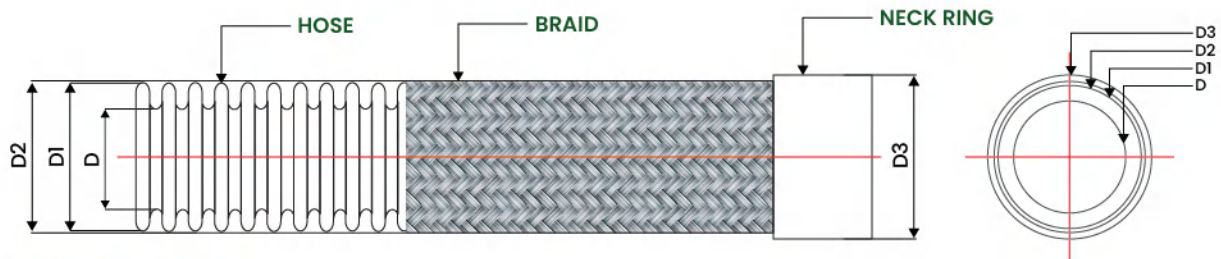

METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID							
				COVERAGE	ID	OD	WP	BP	DYNAMIC	STATIC	WEIGHT
				%	(D) mm	(D1 & D2) mm	(Max) @20°C bar	(Min) @20°C bar			
1 1/4"	R032HFMX00P	0	48 X 8 X 0.4	92	31.60	43.20	1.2	--	--	--	0.38
	R032HFMXR1P	1			31.60	44.80	30	120	300	105	0.88
	R032HFMXR2P	2			31.60	46.40	45	180	--	--	1.38
1 1/2"	R040HFMX00P	0	48 X 9 X 0.4	92	40.30	51.50	1.2	--	--	--	0.49
	R040HFMXR1P	1			40.30	53.10	30	120	340	130	1.05
	R040HFMXR2P	2			40.30	54.70	45	180	--	--	1.61
2"	R050HFMX00P	0	48 X 10 X 0.4	96	49.50	62.70	1	--	--	--	0.65
	R050HFMXR1P	1			49.50	64.30	24	96	390	160	1.27
	R050HFMXR2P	2			49.50	65.90	36	144	--	--	1.88
2 1/2"	R065HFMX00P	0	72 X 7 X 0.5	94	64.80	78.30	0.8	--	--	--	0.85
	R065HFMXR1P	1			64.80	80.30	22	88	460	200	1.88
	R065HFMXR2P	2			64.80	82.30	33	132	--	--	2.91

3"	R080HFMX00P	0	72 X 8 X 0.5	96	79.80	96.50	0.7	--	--	--	1.15
	R080HFMXR1P	1			79.80	98.50	18	72	660	240	2.35
	R080HFMXR2P	2			79.80	100.50	27	108	--	--	3.54
4"	R100HFMX00P	0	72 X 10 X 0.5	94	99.80	116.20	0.55	--	--	--	1.42
	R100HFMXR1P	1			99.80	118.20	16	64	750	290	2.89
	R100HFMXR2P	2			99.80	120.20	24	96	--	--	4.36
5"	R125HFMX00Z	0	72 X 10 X 0.6	92	130.00	154.00	0.4	--	--	--	2.90
	R125HFMXR1Z	1			130.00	157.50	14	56	1000	350	5.13
	R125HFMXR2Z	2			130.00	159.90	21	84	--	--	7.44
6"	R150HFMX00Z	0	72 X 11 X 0.6	90	154.00	180.50	0.3	--	--	--	3.42
	R150HFMXR1Z	1			154.00	182.50	10	40	1250	400	5.91
	R150HFMXR2Z	2			154.00	184.90	15	60	--	--	8.40
8"	R200HFMX00Z	0	96 X 9 X 0.67	90	204.00	233.40	0.3	--	--	--	5.60
	R200HFMXR1Z	1			204.00	236.00	8	32	1600	520	8.64
	R200HFMXR2Z	2			204.00	238.68	12	48	--	--	11.69
10"	R250HFMX00Z	0	96 X 12 X 0.7	90	254.00	282.00	0.2	--	--	--	8.31
	R250HFMXR1Z	1			254.00	285.00	7.5	30	2000	620	13.97
	R250HFMXR2Z	2			254.00	287.80	11.25	45	--	--	19.62
12"	R300HFMX00Z	0	96 X 14 X 0.7	94	312.00	348.00	0.2	--	--	--	10.80
	R300HFMXR1Z	1			312.00	352.00	6	24	2400	725	18.20
	R300HFMXR2Z	2			312.00	354.80	9	36	--	--	25.60


Note:

1. Test pressure is 1.5 times of working pressure @ 20°C
2. This information is for guidance only, we reserve the right to alter or amend specifications as deemed necessary.
3. General tolerance is applicable.



1.9 PH 2500 SERIES – HMH

- Structure** : Annular Corrugated Mechanical / Hydroformed flexible metal hoses produced from longitudinally welded tubes with or without braiding
- Characteristics** : Heavy weight / Medium flexible
- Standards** : EN ISO 10380
- Hose Material** : Stainless Steel AISI 304, AISI 321, AISI 316L
- Braiding Material** : Stainless Steel AISI 304L and AISI 316L
- Suitable fittings types** : Threaded end, Flange end, Pipe end, etc. as per customer specifications

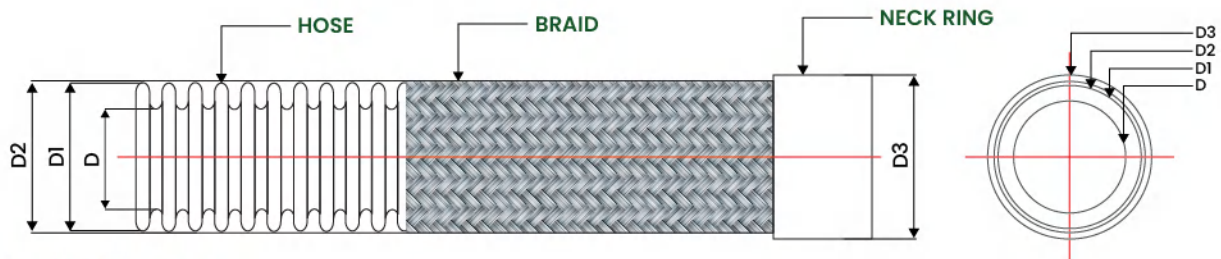

METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID							
				COVERAGE	(D)	(D1 & D2)	(Max) @20°C	(Min) @20°C	DYNAMIC	STATIC	WEIGHT
				%	mm	mm	bar	bar	mm	mm	kg/m
1/4"	R006HMHX00T	0	24 X 5 X 0.35		6.00	10.10	12.4	--	--	--	0.130
	R006HMHXR1T	1			6.00	11.50	146	584	127.00	25.00	0.249
	R006HMHXR2T	2			6.00	12.90	215.5	862	--	--	0.368
3/8"	R010HMHX00T	0	24X 7X 0.35		11.00	16.20	7	--	--	--	0.185
	R010HMHXR1T	1			11.00	17.60	103.5	414	140.00	32.00	0.364
	R010HMHXR2T	2			11.00	19.00	165.5	662	--	--	0.542
1/2"	R012HMHX00T	0	24X 7X 0.35		12.10	16.70	5.5	--	--	--	0.168
	R012HMHXR1T	1			12.10	18.10	74	296	152.00	38.00	0.332
	R012HMHXR2T	2			12.10	19.50	118.6	474.4	--	--	0.495
3/4"	R020HMHX00T	0	36 X 8 X 0.35		20.2	26.7	4.8	--			0.440
	R020HMHXR1T	1			20.2	28.1	54.6	218.4	203	57	0.738
	R020HMHXR2T	2			20.2	29.5	87	348	--	--	1.035

1"	R025HMHX00T	0	36X 9X 0.35		25.30	32.30	2.8	--	--	--	0.586
	R025HMHXR1T	1			25.30	33.70	39.4	157.6	229.00	70.00	0.913
	R025HMHXR2T	2			25.30	35.10	63	252	--	--	1.241
1 1/4"	R032HMHX00P	0	48 X 7 X 0.4		33.60	41.20	1.7	--	--	--	0.756
	R032HMHXR1P	1			33.60	42.80	36.6	146.4	267.00	89.00	1.217
	R032HMHXR2P	2			33.60	44.40	58.6	234.4	--	--	1.679
1 1/2"	R040HMHX00P	0	48 X 9 X 0.4		40.00	49.50	1.4	--	--	--	0.980
	R040HMHXR1P	1			40.00	51.10	32.5	130	305.00	102.00	1.560
	R040HMHXR2P	2			40.00	52.70	52.1	208.4	--	--	2.141
2"	R050HMHX00P	0	48 X 9 X 0.5		50.40	60.70	1	--	--	--	1.232
	R050HMHXR1P	1			50.40	62.70	35.6	142.4	381.00	127.00	2.155
	R050HMHXR2P	2			50.40	64.70	57	228	--	--	3.077
2 1/2"	R065HMHX00P	0	72 X 7 X 0.5		62.80	76.30	0.8	--	--	--	1.210
	R065HMHXR1P	1			62.80	78.30	26.7	106.8	508	203	2.252
	R065HMHXR2P	2			62.80	80.30	42.7	170.8	--	--	3.293
3"	R080HMHX00P	0	72 X 8 X 0.5		78.70	94.50	0.7	--	--	--	1.890
	R080HMHXR1P	1			78.70	96.50	21.8	87.2	559	229	3.066
	R080HMHXR2P	2			78.70	98.50	35	140	--	--	4.241
4"	R100HMHX00P	0	72 X 10 X 0.5		97.80	114.20	0.6	--	--	--	2.600
	R100HMHXR1P	1			97.80	116.20	16	64	686	330	4.073
	R100HMHXR2P	2			97.80	118.20	25.6	102.4	--	--	5.547
5"	R125HMHX00Z	0	72 X 8 X 0.65		130.00	154.00	0.4	--	--	--	3.120
	R125HMHXR1Z	1			130.00	156.60	13.2	52.8	787	457	4.980
	R125HMHXR2Z	2			130.00	159.10	21	84	--	--	6.840
6"	R150HMHX00Z	0	96 X 12 X 0.5		154.00	180.00	0.3	--	--	--	3.400
	R150HMHXR1Z	1			154.00	182.00	11.4	45.6	914	483	5.305
	R150HMHXR2Z	2			154.00	184.00	18.2	72.8	--	--	7.210

Note:

1. Test pressure is 1.5 times of working pressure @ 20°C
2. This information is for guidance only, we reserve the right to alter or amend specifications as deemed necessary.
3. General tolerance is applicable.




1.11 PH 2600 ABRASION RESISTANT

- Material Available in SS304L & SS316L
- Clean and oil-free
- Soft texture allows for easy trimming and quicker hose assembly fabrication
- Engineered for optimal hose coverage

Abrasion Resistant Tubular Braid for Series PH 2000, PH 2100 & PH2200 Hose

METRIC SYSTEM

DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID COVERAGE			
					(D)	(D1 & D2)	WEIGHT
					mm	mm	kg/m
1/4"	W006000XR10Z	1	24 X 4 X 0.3	94	9.60	10.80	0.08
5/16"	W008000XR10Z	1	24 X 5 X 0.3	92	12.10	13.60	0.09
3/8"	W010000XR10Z	1	24 X 6 X 0.3	92	14.10	15.70	0.12
1/2"	W012000XR10Z	1	24 X 7 X 0.3	92	16.70	18.20	0.14
5/8"	W016000XR10Z	1	36 X 7 X 0.3	96	21.90	23.50	0.19
3/4"	W020000XR10Z	1	36 X 9 X 0.3	94	26.70	28.20	0.26
1"	W025000XR10Z	1	36 X 10 X 0.3	96	32.30	33.80	0.26
1.1/4"	W032000XR10Z	1	48 X 8 X 0.4	94	41.20	43.00	0.50
1.1/2"	W040000XR10Z	1	48 X 9 X 0.4	92	49.50	51.30	0.58
2"	W050000XR10Z	1	48 X 10 X 0.4	96	60.70	62.60	0.63

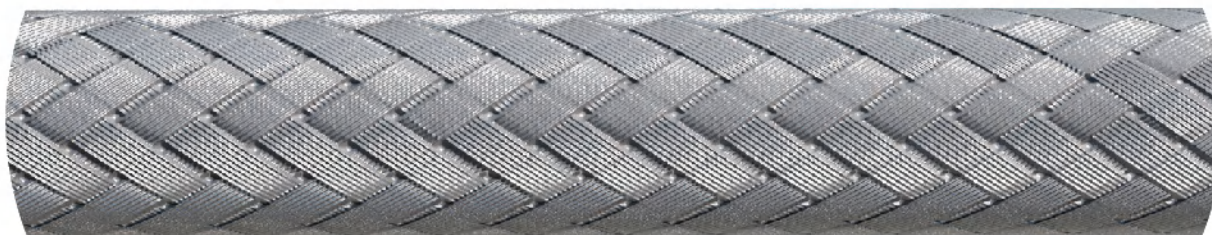

1.12 PH 2700 ABRASION RESISTANT


- Material Available in SS304L & SS316L
- Clean and oil-free
- Soft texture allows for easy trimming and quicker hose assembly fabrication
- Engineered for optimal hose coverage

Abrasion Resistant Tubular Braid for Series PH2300 Hose

METRIC SYSTEM


DN	ITEM CODE	BRAIDS	BRAID CONSTRUCTION (NO OF CARRIERS X NO OF STRANDS X WIRE DIAMETER)	BRAID COVERAGE			
					(D)	(D1 & D2)	WEIGHT
					mm	mm	kg/m
1/4"	OW006000XR10Z	1	24 X 5 X 0.35	98	10.10	12.20	0.13
5/16"	OW008000XR10Z	1	24 X 6 X 0.35	98	12.20	14.50	0.14
3/8"	OW010000XR10Z	1	24 X 8 X 0.35	98	16.20	18.00	0.21
1/2"	OW012000XR10Z	1	24 X 9 X 0.35	94	21.10	22.90	0.23
3/4"	OW020000XR10Z	1	36 X 9 X 0.35	95	30.70	32.50	0.32
1"	OW025000XR10Z	1	36 X 10 X 0.35	92	38.50	40.30	0.37
1.1/4"	OW032000XR10Z	1	48 X 9 X 0.4	95	45.00	46.60	0.56
1.1/2"	OW040000XR10Z	1	48 X 10 X 0.4	95	55.00	56.60	0.62
2"	OW050000XR10Z	1	48 X 10 X 0.5	95	65.00	67.00	1.00
2.1/2"	OW065000XR10Z	1	72 X 8 X 0.5	94	83.00	85.00	1.17
3"	OW080000XR10Z	1	72 X 9 X 0.5	96	97.50	100.00	1.30
4"	OW100000XR10Z	1	72 X 11 X 0.5	96	120.00	122.50	1.59
5"	OW125000XR10Z	1	72 X 11 X 0.7	93	154.00	157.00	3.12
6"	OW150000XR10Z	1	72 X 11 X 0.7	90	180.00	183.00	3.40
8"	OW200000XR10Z	1	96 X 9 X 0.7	90	233.00	237.00	4.05
10"	OW250000XR10Z	1	96 X 12 X 0.7	90	282.00	287.00	5.66

1.13 PRODUCT NOMENCLATURE (Stripwound Hose)

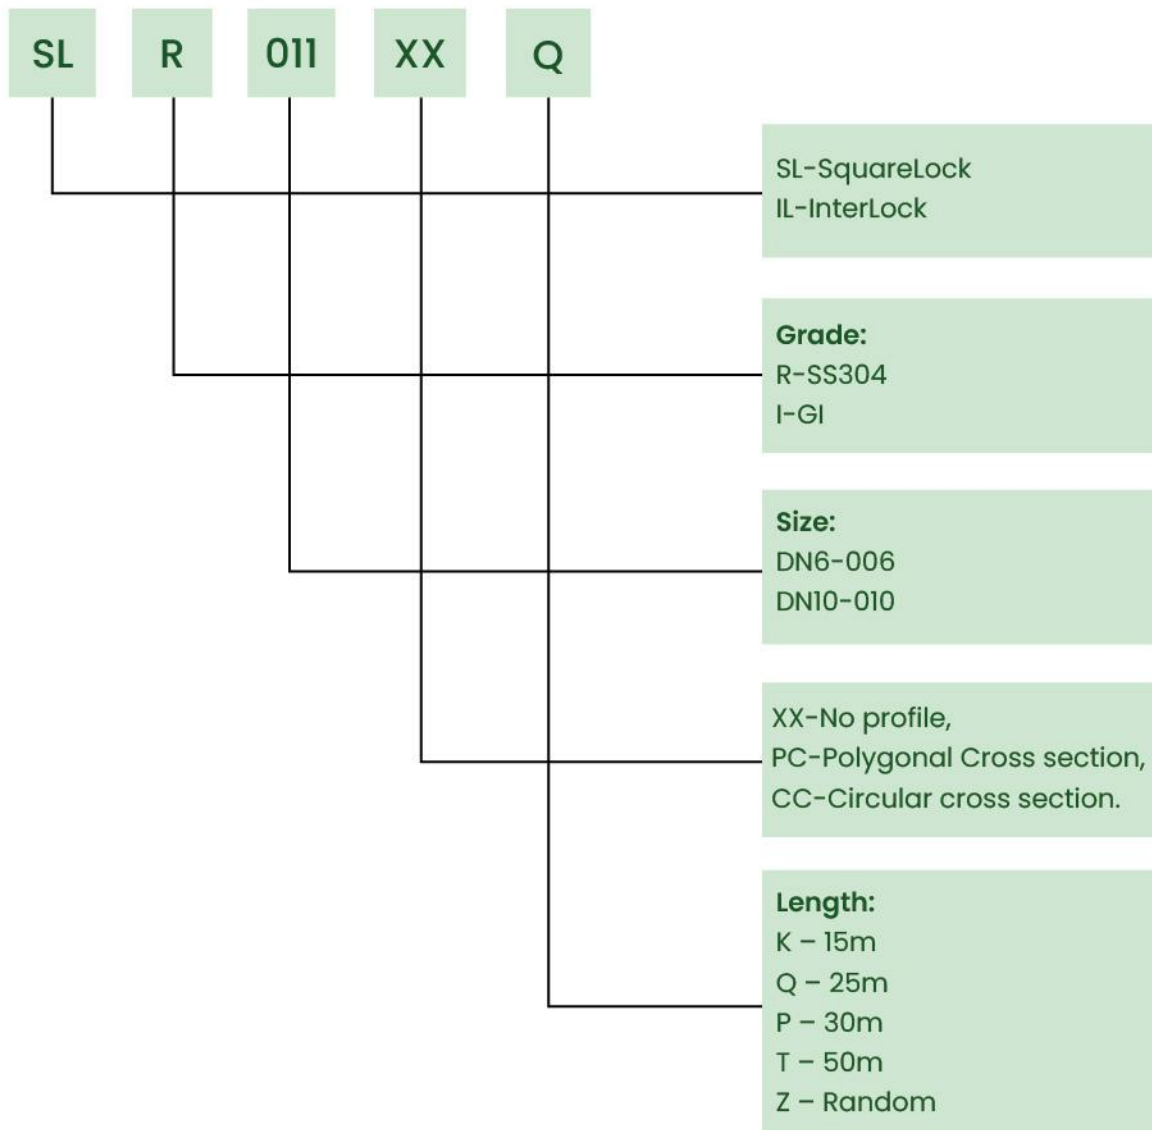

DOUBLE INTERLOCK

1.14 TECHNICAL SPECIFICATION FOR DOUBLE INTERLOCK

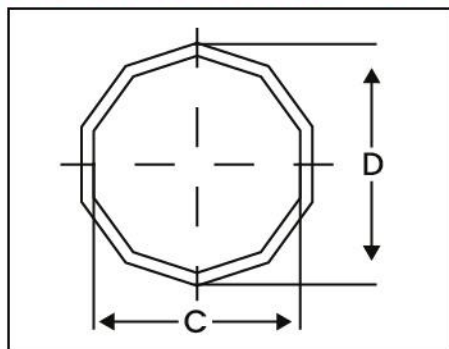

POLYGONAL CROSS SECTION




INTERLOCK - UNPACKED									
NOMINAL SIZE		ID		OD		WEIGHT ±10%		MIN BEND RAD +10%	
INCH	MM	MM	INCH	MM	INCH	KG/M	LBS	MM	INCH
1.1/2"	38	38	1.50	42	1.654	0.900	0.604	180	7.087
	40	40	1.57	44	1.732	1.090	0.731	200	7.874
1.3/4"	45	45	1.77	49	1.929	1.220	0.819	225	8.858
	46	46	1.81	50	1.969	1.260	0.845	230	9.055
2	51	51	2.01	55	2.165	1.430	0.960	250	9.843
	52	52	2.05	56	2.205	1.490	1.000	260	10.236
2.1/4"	57	57	2.24	61	2.402	1.640	1.100	275	10.827
	60	60	2.36	64.5	2.539	1.750	1.174	300	11.811
2.1/2"	65	65	2.56	67.5	2.657	1.910	1.282	325	12.795
	70	70	2.76	74.5	2.933	2.070	1.389	350	13.780
3"	76	76	2.99	80.5	3.169	2.230	1.496	375	14.764
	80	80	3.15	84.5	3.327	2.390	1.604	400	15.748
	85	85	3.35	89.5	3.524	2.550	1.711	425	16.732
	87	87	3.43	91.5	3.602	2.610	1.751	435	17.126
3.1/2"	90	90	3.54	94.5	3.720	2.700	1.812	450	17.717
4"	101	101	3.98	105.5	4.154	3.000	2.013	500	19.685
	110	110	4.33	114.5	4.508	3.480	2.335	550	21.654
	115	115	4.53	119.5	4.705	3.720	2.496	575	22.638
	120	120	4.72	124.5	4.902	3.960	2.657	600	23.622
	130	130	5.12	134.5	5.295	4.320	2.899	650	25.591
	140	140	5.51	144.5	5.689	4.500	3.020	700	27.559
6"	150	150	6	154.5	6.083	4.700	3.154	750	29.528

DOUBLE INTERLOCK

1.15 TECHNICAL SPECIFICATION

FOR DOUBLE INTERLOCK

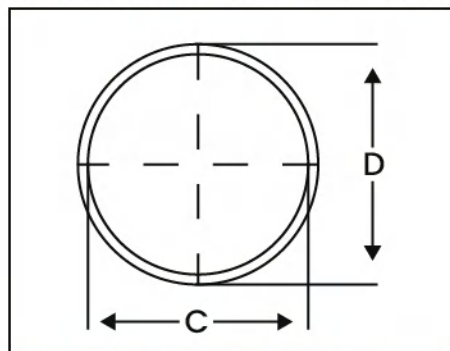

CIRCULAR CROSS SECTION



INTERLOCK - UNPACKED									
NOMINAL SIZE		ID		OD		WEIGHT		MIN BEND RAD +10%	
INCH	MM	MM	INCH	MM	INCH	KG/M	LBS	MM	INCH
3/8"	9	9	0.35	12	0.472	0.145	0.097	45	1.772
	10	10	0.39	13	0.512	0.160	0.107	50	1.969
	11	11	0.43	14	0.551	0.190	0.127	55	2.165
	12	12	0.47	15	0.591	0.213	0.143	65	2.559
1/2"	13	13	0.51	16	0.630	0.230	0.154	70	2.756
	14	14	0.55	17	0.669	0.248	0.166	75	2.953
	15	15	0.59	18	0.709	0.265	0.178	80	3.150
5/8"	16	16	0.63	19	0.748	0.283	0.190	82	3.228
	17	17	0.67	20	0.787	0.301	0.202	85	3.346
	18	18	0.71	21	0.827	0.319	0.214	90	3.543
	18	18	0.71	22	0.866	0.335	0.225	90	3.543
3/4"	19	19	0.75	23	0.906	0.350	0.235	95	3.740
	20	20	0.79	24	0.945	0.370	0.248	100	3.937
	21	21	0.83	25	0.984	0.390	0.262	105	4.134
	22	22	0.87	26	1.024	0.400	0.268	110	4.331
	23	23	0.91	27	1.063	0.420	0.282	115	4.528
	24	24	0.94	28	1.102	0.440	0.295	120	4.724
1"	25	25	0.98	29	1.142	0.460	0.309	125	4.921
	26	26	1.02	30	1.181	0.480	0.322	130	5.118
	27	27	1.06	31	1.220	0.500	0.336	135	5.315
1 1/8"	28	28	1.10	32	1.260	0.520	0.349	140	5.512
	29	29	1.14	33	1.299	0.540	0.362	145	5.709
1 1/4"	32	32	1.26	35.0	1.378	0.580	0.389	160	6.299
1 1/2"	40	40	1.57	43.5	1.713	0.690	0.463	180	7.087
1 3/4"	45	45	1.77	48.5	1.909	0.800	0.537	190	7.480

2"	50	50	1.97	53.5	2.106	1.450	0.973	205	8.071
2.3/16"	55	55	2.17	59.5	2.343	1.600	1.074	225	8.858
2.3/8"	60	60	2.36	64.0	2.520	1.740	1.168	234	9.213
2.1/2"	65	65	2.56	69.0	2.717	1.890	1.268	245	9.646
2.5/8"	70	70	2.76	74.0	2.913	2.030	1.362	273	10.748
3"	75	75	2.95	79.0	3.110	2.180	1.463	293	11.535
3.5/16"	80	80	3.15	84.0	3.307	2.320	1.557	312	12.283
3.3/8"	85	85	3.35	89.0	3.504	2.450	1.644	330	12.992
4"	100	100	3.94	105.0	4.134	2.900	1.946	390	15.354
4.3/8"	110	110	4.33	115.0	4.528	3.090	2.073	430	16.929
4.3/4"	120	120	4.72	125.0	4.921	3.480	2.335	468	18.425
5"	125	125	4.92	130.0	5.118	3.630	2.436	490	19.291
5.1/4"	130	130	5.12	135.0	5.315	4.790	3.214	620	24.409
5.5/8"	140	140	5.51	145.0	5.709	5.250	3.523	665	26.181
6"	150	150	5.91	155.0	6.102	5.550	3.724	715	28.150
7.1/2"	190	190	7.48	195.0	7.677	7.000	4.697	905	35.630
8"	200	200	7.9	205.0	8.071	7.400	4.965	950	37.402
9.1/2"	240	240	9.45	245.0	9.646	8.850	5.938	1150	45.276
12"	300	300	11.8	305.0	12.008	11.050	7.415	1440	56.693

10.2 TECHNICAL SPECIFICATION FOR SQUARE LOCK ROUND CROSS SECTION



SQUAELOCK - UNPACKED									
NOMINAL SIZE		ID		OD		WEIGHT ±10%		MIN BEND RAD +10%	
INCH	MM	MM	INCH	MM	INCH	KG/M	LBS	MM	INCH
3/8"	8	8.73	0.34	11.51	0.453	0.1	0.067	22	0.866
	9	9.53	0.38	12.70	0.500	0.11	0.074	25	0.984
	11	11.11	0.44	14.29	0.563	0.12	0.081	31	1.220
1/2"	12	12.7	0.50	15.88	0.625	0.125	0.084	32	1.260
	14	14.29	0.56	17.46	0.687	0.140	0.094	35	1.378
	15	15.88	0.63	19.05	0.750	0.150	0.101	37	1.457
3/4"	19	19.05	0.75	24.61	0.969	0.215	0.144	40	1.575
	22	22.23	0.88	25.4	1.000	0.280	0.188	48	1.890
1"	25	25.40	1.00	28.58	1.125	0.292	0.196	60	2.362

上海沅峻流体科技有限公司 - AG授权分销商

TEL:+86-21-58400374/58400394

FAX:+86-21-50182690

E-mail:fengjunfluid@163.com

ADD:上海市奉贤区浦卫公路6655号一号厂房

<https://tiger-flex.com.cn/>

Weld Neck Flange / Fixed Flange

Material : SS 304 / SS 316L / CS

Flange : ANSI, DIN, JIS, TABLE FLANGE & as per customer req

Class : #150-01, #300-02

SIZE	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"	10"
L(IN)-#150	0.38	0.44	0.5	0.56	0.62	0.69	0.81	0.88	0.88	0.88	0.94	1.06	1.12
L(IN)-#300	0.5	0.56	0.62	0.69	0.75	0.81	0.94	1.06	1.19	1.31	1.38	1.56	1.81



Swivel Flange

Material : SS 304 / SS 316L / CS

Flange : ANSI, DIN, JIS, TABLE FLANGE & as per customer req

Class : #150-01, #300-02

SIZE	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"	10"
L(IN)-#150	0.38	0.44	0.5	0.56	0.62	0.69	0.81	0.88	0.88	0.88	0.94	1.06	1.12
L(IN)-#300	0.5	0.56	0.62	0.69	0.75	0.81	0.94	1.06	1.19	1.31	1.38	1.56	1.81



Hex Nut / Female

Material : SS 304 / SS 316L / CS

Thread : BSP, BSPT, NPT, NPSM

Thread : BSP-01, BSPT-02, NPT-03, NPSM-04, GasPitch-05, M22 X1.5-06

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	3"
L(IN)	0.669	0.709	0.787	0.866	0.945	1.024	1.102	1.181	1.378
AF(IN)	0.748	0.866	1.063	1.260	1.496	1.969	2.165	2.559	3.858



TC -Clamp


Material : SS 304 / SS 316L / CS

SIZE	1/2"	3/4"	1"	1.1/2"	2"	2.1/2"	3"	4"	6"	8"
A(IN)	1.125	1.125	1.125	1.125	1.125	1.125	1.125	1.125	1.5	1.5
B(IN)	0.370	0.620	0.870	1.370	1.870	2.370	2.870	3.834	5.782	7.760
C(IN)	0.5	0.75	1	1.5	2	2.5	3	4	6	8



3.1 ASSEMBLED HOSE

Flanged End Fitting

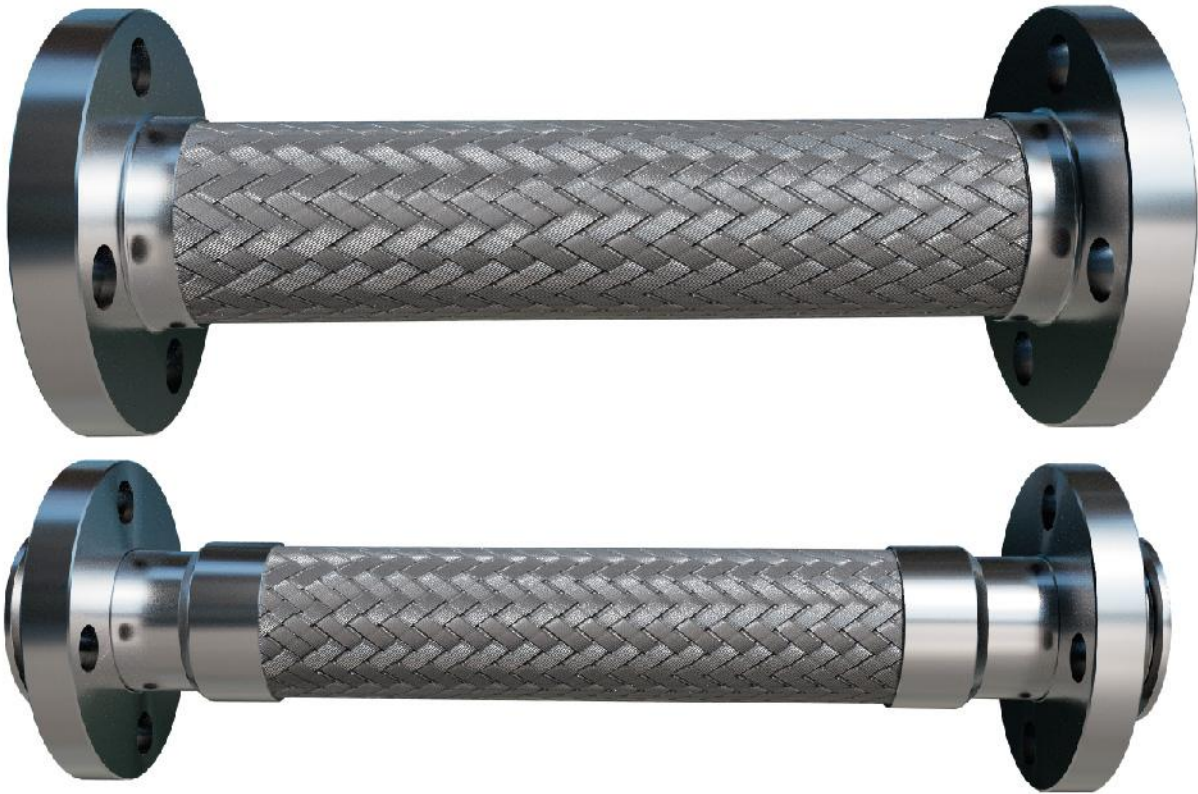

Hose with Camlock Arrangement




Threaded Pipe Arrangement



Swivel Female Arrangement



Bend Pipe

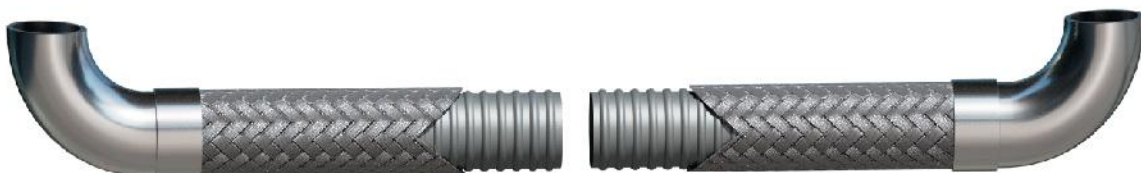

3.2 CORRUGATED METAL HOSE

(DESIGNING AN ASSEMBLY)

Analyzing an Application

S.T.A.M.P.E.D.

To properly design a metal hose assembly for a particular application, the following design parameters must be determined. To help remember them, they have been arranged to form the acronym "S.T.A.M.P.E.D."

SIZE

The diameter of the connections in which the assembly will be installed is needed to provide a proper fit. This information is required.

TEMPERATURE

As the temperature to which the assembly is exposed (internally and externally) increases, the strength of the assembly's components decreases. Also, the coldest temperature to which the hose will be exposed can affect the assembly procedure and/or fitting materials. If you do not provide this information, it will be assumed that the temperatures are 70°F.

APPLICATION

This refers to the configuration in which the assembly is installed. This includes both the dimensions of the assembly as well as the details of any movement that the assembly will experience. This information is necessary to calculate assembly length and required flexibility.

MEDIA

Identify all chemicals to which the assembly will be exposed, both internally and externally. This is important since you must be sure that the assembly's components are chemically compatible with the media going through the hose as well as the environment in which the hose is installed. If no media is given, it will be assumed that both the media and the external environment are compatible with all of the available materials for each component.

PRESSURE

Identify the internal pressure to which the assembly will be exposed. Also, determine if the pressure is constant or if there are cycles or spikes. This information is important to determine if the assembly is strong enough for the application. If no pressure is given it will be assumed that the pressure is low and there are no pressure surges or spikes.

END FITTINGS

Identify the necessary end fittings. This is required since fittings for the assembly must be chosen to properly fit the mating connections.

DYNAMICS

Identify the velocity at which the media will flow through the assembly. Since a corrugated metal hose does not have a smooth interior, rapid media flow can set up a resonant frequency that will cause the hose to vibrate and prematurely fail. If no velocity is given, it will be assumed that the velocity is not fast enough to affect the assembly's performance.

3.3 PRODUCT NOMENCLATURE (Assembled Hose)

A	020	G	2	R	1525	MT03	SF01	S16	
									First digit: "A" represents the Assembly Hose
									Digit 2,3 and 4: ID of Hose 6.3mm ID DN 6 - 006..... 20.2mm ID DN 20 - 020..... 254mm ID DN 250 - 250.
									Digit 5: Grade of Hose R - Red - SS 304 G - Green - SS 316L B - Blue - SS 321 Y - Yellow - SS 304L
									Digit 6: Type of Braid 0 - Non Braided Hose 1 - Single Braided Hose 2 - Double Braided Hose 3 - Triple Braided Hose
									Digit 7: Grade of Braid R - Red - SS 304 G - Green - SS 316L Y - Yellow - SS 304L
									Digit 8, 9, 10 and 11: Length of Hose Assembly in (cm) 0100 - 100 cm Length 1525 - 1525 cm Length.....
									Digit 12, 13, 14, 15, 16, 17, 18, 19: Type of End Fittings @Both Ends MT 01 - BSP Male Nuts MT 02 - BSPT Male Nuts MT 03 - NPT Male Nuts FT 01 - BSP Female Nuts FT 02 - BSPT Female Nuts FT 03 - NPT Female Nuts SF 01 - Swivel Flange# 150 FF 01 - Fixed Flange# 150 SF 02 - Swivel Flange# 300
									Digit 20, 21: Grade of Fittings S04 - SS 304 S16 - SS 316 M00 - Carbon Flanges

Note: Endfitting based on customer requirement

3.4 PUMP CONNECTOR

This Pump Connector is used to absorb noise and vibration on a piping system, and help to avoid piping stress.

Type:

1. Flexible Flange Pump Connector
2. Threaded Pump Connector

12.1 Flexible Flange Pump Connector

Features:

Hose Material	: SS304 , SS316L & SS321
Hose Series	: 2300 HFH
Braid Material	: SS304 & SS316L
Type of Braid	: Single Braid
Size	: DN 50 to DN 300
End Fitting	: Fixed Flange
End Fitting Material	: MS
End Fitting Dim	: As per B16.5 #150
Length	: As per customer requirement
Application	: Heavy Duty
Packing	: Individual box with Weight Balancing Stiffener #300, #600 Flange
Optional	: Double Braid, Swivel Flange



HOSE ID (INCH)	PART NO	*OAL (INCH)	*LIVE LENGTH (INCH)	*FITTING LENGTH (EACH END)	WORKING PRESSURE @70°F PSI
2"	PC-050-FF	9"	5.3/4"	5/8"	464
2.1/2"	PC-065-FF	9"	5.3/4"	5/8"	435
3"	PC-080-FF	9"	5.3/4"	5/8"	362.5
4"	PC-100-FF	9"	5.3/4"	5/8"	275.5
5"	PC-125-FF	11"	7.1/2"	3/4"	203
6"	PC-150-FF	11"	7.1/2"	3/4"	145
8"	PC-200-FF	12"	8"	1"	116
10"	PC-250-FF	13"	9"	1"	108.7
12"	PC-300-FF	14"	10"	1"	87

12.2 Threaded Pump Connector

Features:

Hose Material	: SS304 , SS316L & SS321
Hose Series	: 2200 MFH
Braid Material	: SS304 & SS316L
Type of Braid	: Single Braid
Size	: DN 12 to DN 50
End Fitting	: Threaded male connector
End Fitting Material	: MS
Length	: As per Customer requirement
Application	: low-pressure utility applications.
Optional	: SS Fitting, Hex Nut arrangement, Double Braid



HOSE ID (INCH)	PART NO	*OAL (INCH)	*LIVE LENGTH (INCH)	*FITTING LENGTH (EACH END)	WORKING PRESSURE @70°F PSI
1/2"	PC-012-MM	6.1/2"	2.1/4"	1.1/2"	1087.7
3/4"	PC-020-MM	7"	2.1/4"	1.1/2"	899
1"	PC-025-MM	8"	3"	1.3/4"	725
1.1/4"	PC-032-MM	8.1/2"	3"	2"	667
1.1/2"	PC-040-MM	9"	3.1/2"	2"	609
2"	PC-050-MM	10.1/2"	4.1/2"	2.1/4"	464
2.1/2"	PC-065-MM	12"	5.1/2"	2.1/2"	435
3"	PC-080-MM	14"	6.1/2"	3"	362.5
4"	PC-100-MM	16"	7"	3.1/2"	275.5

Note: As per customer requirement

3.5 NON-WELDED HOSE ASSEMBLY

Hose : PH 2300 Series HFH / PH 2000 Series MFM
End Fitting : Threaded Type (NPT, BSPT, BSPP)
EF Material : CS & SS



SIZE	HOSE ID (IN)	HOSE OD (IN)	L	OAL
1/4"	0.24	0.4	1.97	*
5/16"	0.30	0.48	1.97	*
3/8"	0.43	0.64	1.97	*
1/2"	0.57	0.83	1.97	*
3/4"	0.81	1.21	1.97	*
1"	1.08	1.52	1.97	*

Note: Based on customer requirement

4.1 ARMOR & LINER

ARMOR



LINER



4.2 PCSCH(TPV)

Corrugated Braided Hose consist of PH 2000 SERIES-HFH hose & single outer braid with outer jacket of ThermoPlastic Vulcanizates (TPV). End Fitting as per customer requirement.

Extruded TPV Hose Features:

- Hose Material** : PH 2000 SERIES-MFM Hose
- Braid Material** : SS304
- Jacket material** : ThermoPlastic Vulcanizates(TPV)
- Operating Temp** : -76°F to 275°F



Figure 1 - Extruded Hose Dimensions

SIZE	HOSE ID (INCH)	BRAIDED HOSE OD (INCH)	EXTRUSION THICKNESS (INCH)	MAWP (PSIG)@ 70°F	MIN STATIC BEND RADIUS (INCH)	MIN DYNAMIC BEND RADIUS (INCH)
1/4"	0.25	0.43	0.019- 0.027	1740	0.98	4.33
5/16"	0.34	0.54	0.019- 0.027	1624	1.26	5.12
3/8"	0.39	0.62	0.019- 0.027	1407	1.5	5.91
1/2"	0.48	0.72	0.019- 0.027	1088	1.77	6.50
5/8"	0.65	0.93	0.019- 0.027	870	2.28	7.68
3/4"	0.8	1.11	0.039- 0.047	870	2.76	8.86
1"	1	1.33	0.039- 0.047	725	3.35	10.24
1.1/4"	1.32	1.69	0.051- 0.059	667	4.13	11.81
1.1/2"	1.58	2.02	0.051- 0.059	609	5.12	13.39
2"	1.98	2.47	0.051- 0.059	464	6.3	15.35


Note: Extrusion thickness can be modified as per customer requirement.

4.3 JACKETED HOSE

- Keep cryogenic liquids cold
- Increase flow of viscous media
- Safety containment

A Jacketed Hose Assembly is a hose within a hose. Both inner and outer hoses act independently as separate pressure carriers. Vacuum Jacketed Hose Assemblies are typically found in cryogenic applications because of their insulation properties. Steam Jacketed Hose Assemblies are utilized when the media is viscous and steam is used to help reduce viscosity and increase flow.

Jacketed Hoses are also used in applications where containment of the media is critical in case of rupture of the inner hose.

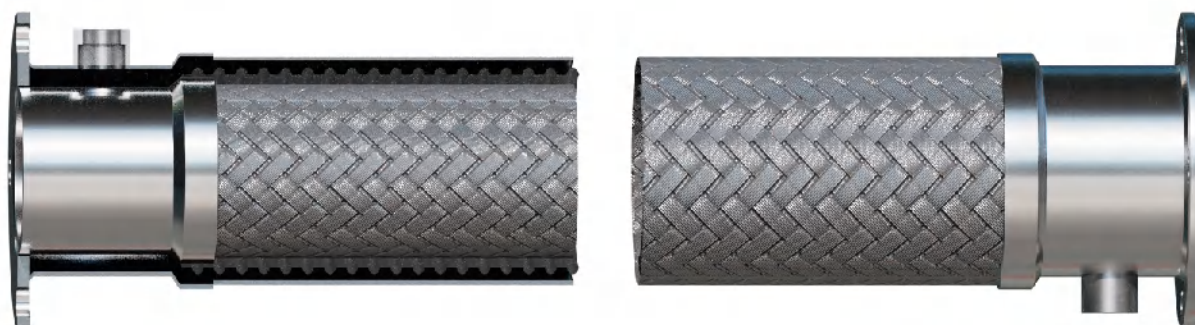

4.4 LANCE HOSE

- Large size range available
- Customized to meet critical application requirements
- Cleaned and capped for commercial oxygen service

Critical applications such as supplying commercial oxygen require expertise of an experienced metal hose manufacturer. Polyhose Tofle Oxygen Lance Hose is fabricated to meet this critical application when specified. Our fabrication department can customize the hose assembly, available in sizes through 16", to include a liner (to reduce turbulence resulting from high velocity), reinforced ends, casing or special end fittings. Each hose assembly is cleaned and capped for commercial oxygen service.


Types of Lance Hose Assemblies

1. Oxygen Lance Hose Assembly
2. Water Lance Hose Assembly


Available Size of Lance Hose Assemblies

1. 4" to 10"- Oxygen Lance Hose Assembly
2. 4" to 10"- Water Lance Hose Assembly

Construction

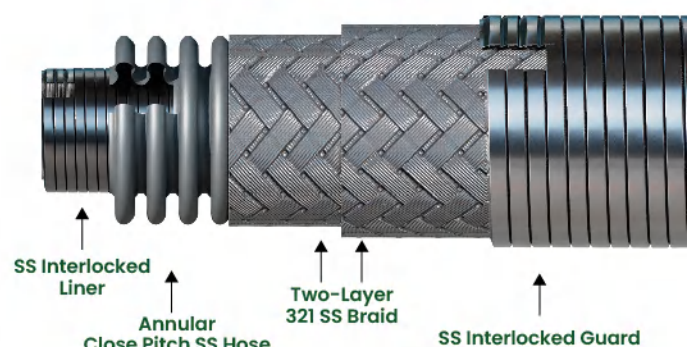

Oxygen Hose Installation

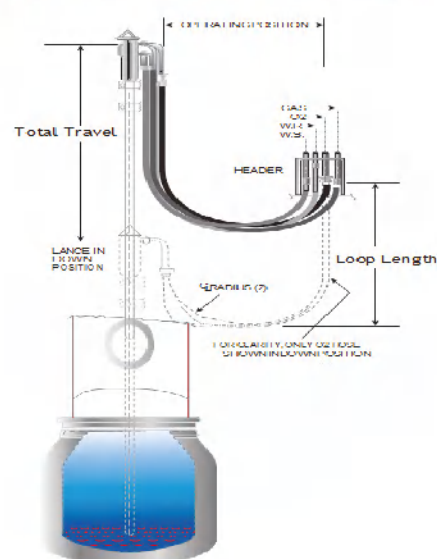

4.5 SOLAR HOSE

Solar Hose is a flexible metal tube stainless steel material covered by High Temp Resistance EDPM Insulation designed for connecting solar heating systems.

Corrugated pliable tubes in AISI 304 thickness 0.3mm preinsulated with:

- EDPM closed cell structure insulation coating and covered.
- Films providing high protection from UV rays and mechanical wear.
- Special formulation of flexible expanded polyurethane that makes the tube suitable for continuous operative temperature up to 150°C. The thermal insulation is covered by an aluminium layer that is in turn covered by a film providing high protection from UV rays and mechanical wears.

Solar Single Sunset



Solar single sunset are composed by PCSSH in AISI 304, thick-0.3mm with EDPM closed cell structure insulation coating and covered with mechanical wear and UV protective film.

Solar Single Sunset hoses are available with or without the electric cable.


Available Size : DN 12, DN16, DN20 & DN25

Steel Thickness : 0.3mm

Application : Heating Systems & Solar Systems

SIZE	CONNECTION THREAD	SS THICK		*LENGTH	
		MM	INCH	M	FT
DN 12	1/2"	0.3	0.012	25	82
		0.3	0.012	50	164
DN 16	3/4"	0.3	0.012	25	82
		0.3	0.012	50	164
DN 20	1"	0.3	0.012	25	82
		0.3	0.012	50	164
DN 25	1.1/4"	0.3	0.012	25	82
		0.3	0.012	50	164

Solar Double Sunset

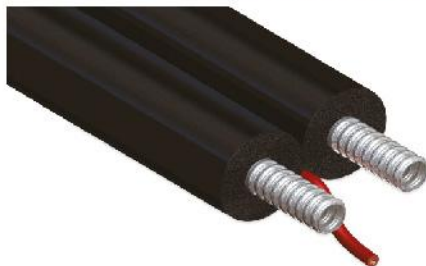

Solar Double Sunsets are composed by PCSSH in AISI 304, thick-0.3mm with EDPM closed cell structure insulation coating and covered with mechanical wear and UV protective film.

Solar Double Sunset hoses are coupled and can be separated easily. This tube can be hand-bended to make easier the laying of the line, both inside and outside the buildings.

Available Size : DN 12, DN16, DN20 & DN25

Steel Thickness : 0.3mm

Application : Heating System & Solar system

SIZE	CONNECTION THREAD	SS THICK		*LENGTH	
		MM	INCH	M	FT
DN 12	1/2"	0.3	0.012	15	49.2
		0.3	0.012	25	82
		0.3	0.012	50	164
DN 16	3/4"	0.3	0.012	15	49.2
		0.3	0.012	25	82
		0.3	0.012	50	164
DN 20	1"	0.3	0.012	15	49.2
		0.3	0.012	25	82
		0.3	0.012	50	164
DN 25	1.1/4"	0.3	0.012	15	49.2
		0.3	0.012	25	82
		0.3	0.012	50	164

Solar Single Press



Solar Single Presses are composed by PCSSH in AISI 304, thickness 0.3mm with red roof color low thickness thermal insulation in expanded polyurethane and covered with mechanical wear and UV protective film.

Solar Single Presses are available without the electric cable.

Available Size : DN16 & DN20

Steel Thickness : 0.3mm

Application : High Working Temp

Solar Double Press



Solar Double Presses are composed by PCSSH in AISI 304, thickness 0.3mm with red roof color low thickness thermal insulation in expanded polyurethane and covered with mechanical wear and UV protective film.

Solar Double Presses are coupled and can be separated easily. This tube can be hand-bended to make easier the laying of the line both inside and outside the buildings.

Available Size : DN16 & DN20

Steel Thickness : 0.3mm

Application : High Working Temp

Solar Thin Power-Mono



Solar Thin Power-Mono Hoses are composed by CSST tube in AISI 304, thickness 0.3mm, preinsulated with a special formulation of flexible expanded polyurethane that makes the tube suitable for continuous operative temperature up to 150°C

Available Size : DN16 & DN20

Steel Thickness : 0.3mm

Note: Length as per customer requirement

SIZE	CONNECTION THREAD	SS THICK		*LENGTH	
		MM	INCH	M	FT
DN 16	3/4"	0.3	0.012	25	82
		0.3	0.012	50	164
		0.3	0.012	100	328
DN 20	1"	0.3	0.012	25	82
		0.3	0.012	50	164
		0.3	0.012	100	328

SIZE	CONNECTION THREAD	SS THICK		*LENGTH	
		MM	INCH	M	FT
DN 16	3/4"	0.3	0.012	25	82
		0.3	0.012	50	164
		0.3	0.012	100	328
DN 20	1"	0.3	0.012	25	82
		0.3	0.012	50	164
		0.3	0.012	100	328

SIZE	CONNECTION THREAD	SS THICK		*LENGTH	
		MM	INCH	M	FT
DN 16	3/4"	0.3	0.012	25	82
		0.3	0.012	50	164
		0.3	0.012	100	328
		0.3	0.012	150	492
		0.3	0.012	200	656
DN 20	1"	0.3	0.012	25	82
		0.3	0.012	50	164
		0.3	0.012	100	328
		0.3	0.012	150	492
		0.3	0.012	200	656

4.6 FLEXIBLE METALIC ELECTRICAL CONDUIT

Conduit:

Construction	:	SS 304/GS, Helicaly wound, flexible conduit with PVC coating
Application	:	General factory Wiring & Connections to machine
Temp	:	-15°C to 70°C
Size	:	3/8" to 1"

Key Features:

- High Compression Strength
- High Pull-Off Strength
- High Abrasion Resistance
- High Impact Strength
- Suitable for Heavy-Duty Applications
- Reduce risk of water or dust ingress



NOMINAL SIZE		ID		SQUARELOCK-OD		PVC THICK	
INCH	MM	MM	INCH	MM	INCH	MM	INCH
3/8"	8	8.73	0.34	11.51	0.453	0.3-0.5	0.012-0.020
	9	9.53	0.38	12.70	0.500	0.3-0.5	0.012-0.020
	11	11.11	0.44	14.29	0.563	0.3-0.5	0.012-0.020
1/2"	12	12.7	0.50	15.88	0.625	0.3-0.5	0.012-0.020
	14	14.29	0.56	17.46	0.687	0.3-0.5	0.012-0.020
	15	15.88	0.63	19.05	0.750	0.3-0.5	0.012-0.020
3/4"	19	19.05	0.75	24.61	0.969	0.3-0.5	0.012-0.020
	22	22.23	0.88	25.4	1.000	0.3-0.5	0.012-0.020
1"	25	25.40	1.00	28.58	1.125	0.3-0.5	0.012-0.020

5.1 ISO 10380 & TESTING

ISO

ISO or International Standards Organization was created to establish worldwide standards for industry. They are responsible for the formulation of standards regarding quality assurance of specific products. The ISO 10380 standard was developed to help define the industry requirements for design, manufacture and testing of corrugated metal hoses and hose assemblies. The following is a summary of the various sections covered in this standard.

Materials

ISO 10380 specification lists the more popular materials used in the manufacture of corrugated metal hoses, braids, ferrules, and end fittings. Two of the most common materials used for corrugated metal hoses are austenitic stainless steel and copper-based alloys.

The specification is very clear that the material used in manufacturing the corrugated metal hose shall be selected on the basis of their suitability for forming or welding and for the application conditions under which they will operate. Materials other than those listed above may be selected by agreement between the manufacturer and the user.

Critical Dimensions

Details and requirements specified in this section include hose diameter, bend radii and overall length tolerances. It is common for manufacturers to list their nominal hose diameter in published literature. ISO 10380 lists the requirement that the actual hose inside diameter will be at least 98% of the nominal hose size. The bend radius covered in the specification includes nominal static and nominal dynamic bend radius. Dynamic bend radius is used in cycle life fatigue testing. Overall length tolerances listed in the ISO 10380 are -1% to +3%.

Design

Pressure

The specification lists the maximum permissible pressure ratings to be used in testing performed in accordance with ISO 10380.

Elevated Temperatures

Pressure reduction for elevated temperature conditions is critical in applying the proper metal hose for an application. This specification provides for a method of determining the maximum service

we pressure for a metal hose assembly under these conditions.

Low Temperatures

The materials listed in the specification, with the exception of carbon steel, do not need to be derated in low temperature applications down to -392°F or -200°C. Carbon steel material used for end fittings may be used to a minimum temperature of -68°F or -20°C.

Cycle Life

Corrugated metal hose bend radius and minimum acceptable cycle life design requirements are outlined. Values and test criteria for meeting static and dynamic bend radii are also listed.

Construction

Hose

Manufacturing and corrugation designs are addressed by the ISO 10380 specification. Seamless or longitudinally-welded tube may be corrugated into annular or helical corrugation designs. Details of methods for joining or segmenting metal hose are also listed.

Braid

ISO 10380 specifications are broad for the design of the braid.

Methods of Assembly

Many different methods of fitting attachment and unacceptable weld characteristics are outlined by the ISO 10380 specification. The use of protective covers is also addressed.

Testing

General Tests

Bend, fatigue, and burst test requirements are defined by ISO 10380. Polyhose Tofle performs each of these tests when designing or qualifying our products. The fatigue test is widely recognized in the metal hose industry as a standard for cycle life testing. While ISO 10380 lists the average number of cycles of 50,000 at their specified pressure ratings, Polyhose Tofle performs testing at our published maximum working pressure.

Production Tests

Several types of non-destructive testing are addressed by the specification. These include pressure proof test by hydraulic pressure or pneumatic pressure and leakage test by pneumatic or vacuum testing. Cleaning and marking of metal hose assemblies is outlined.

5.2 TESTING

1. Non-Destructive Testing: Evaluate the properties of a material, component, structure or system without causing any damage.

2. Destructive Testing: A test method conducted to find the exact point of failure of materials, components, or machines. During the process, the tested item undergoes stress that eventually deforms or destroys the material.

Non-Destructive Testing:

1. Dye Penetrant

Dye penetrant testing is available for both leak and weld bead inspection, in accordance with Polyhose Tofle procedures or to customer-specified standards.

2. Hydrostatic Testing

While the standard test is designed to detect leaks, hydrostatic testing is designed to test the assembly's strength. Testing of an assembly to its full permissible test pressure can be economically and accurately accomplished by filling the assembly with liquid while concurrently evacuating all air. The assembly is then hydrostatically pressurized using high pressure pumps and the test pressure is maintained for a predetermined period of time.

3. Pneumatic Test

Every corrugated hose assembly is leak tested prior to shipment. Standard testing consists of pressurizing the assembly with air and then submerging the entire assembly under water. This method is reliable and sufficient for the majority of applications.

Destructive Testing:

1. Burst Test

Normally, hydraulic pressure is slowly increased until failure occurs. Based on the burst test results, a safety factor is applied. This establishes the ultimate pressure rating.

2. Cycle Test

Purpose: To find fatigue life of Braided Hose

Testing Frequency – As per ISO 10380

Sizes of Testing : DN 6 to DN 250

6 PHTO PACKING METHOD


Step 1 – Bundles wrapped with bubble sheets.

Step 2 – Bundles wrapped with PV Woven fabric.

Step 3 – Only braids can be packed in boxes and loaded in container.

Step 4 – Container loading for bulk hose will be planed according to ordered sizes.

PACKING METHOD-REEL TYPE

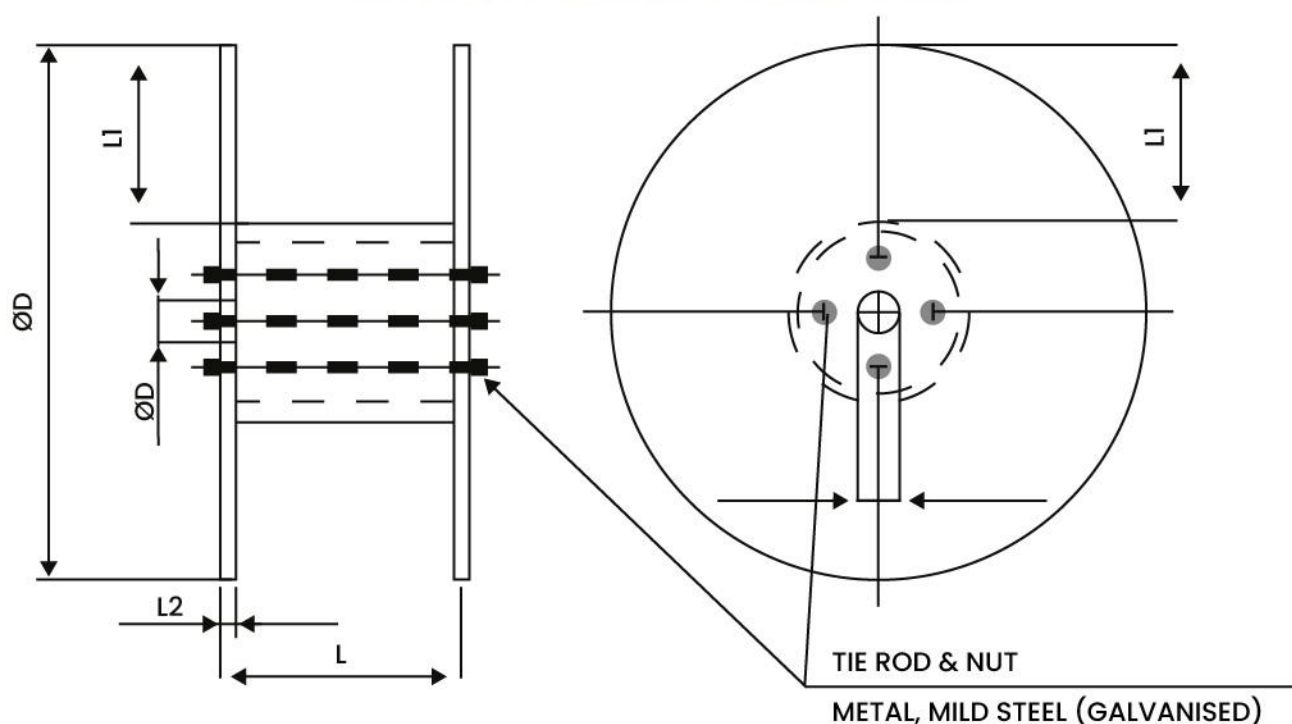


WOODEN REEL CAPACITY		
HOSE SIZE	DRUM TYPE	CAPACITY(FT)
1/4"	B	5905.5
5/16"	B	5249
3/8"	B	3937
1/2"	B	3116.8
5/8"	B	1312
3/4"	B	984
1"	B	820
1.1/4"	B	590.5
1.1/2"	J	492
2"	J	492

TYPE	OD(INCH)	ID(INCH)	L(INCH)	TIE ROD (NOS)
DRUM B	35.43	3.15	31.1	4
DRUM J	48	3.15	41	5

Note: Packing can be customised as per customer requirement.

7.1 TEMPERATURE CORRECTION FACTOR(F)

When hoses are required to work at higher temperatures, the working pressure given in the table should be multiplied by the correction factor. This will determine the pressure rating of the hoses for higher temperatures.

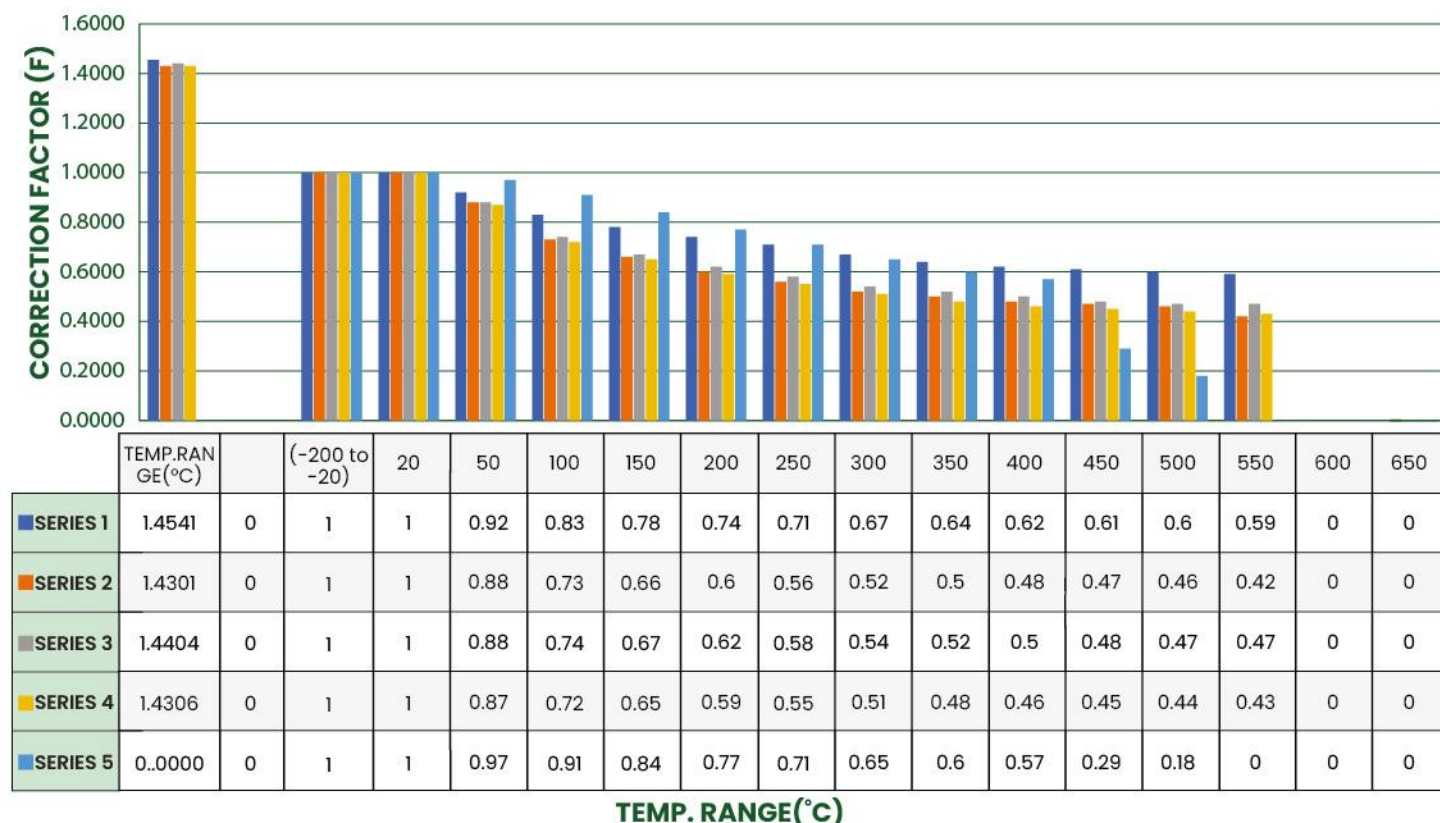

TEMP RANGE(°C)	1.4541	1.4301	1.4404	1.4306	CARBON STEEL
	SS 321	SS 304	SS 316L	SS 304L	
-200 TO -20	1	1	1	1	1
20	1	1	1	1	1
50	0.92	0.88	0.88	0.87	0.97
100	0.83	0.73	0.74	0.72	0.91
150	0.78	0.66	0.67	0.65	0.84
200	0.74	0.6	0.62	0.59	0.77
250	0.71	0.56	0.58	0.55	0.71
300	0.67	0.52	0.54	0.51	0.65
350	0.64	0.5	0.52	0.48	0.6
400	0.62	0.48	0.5	0.46	0.57
450	0.61	0.47	0.48	0.45	0.29
500	0.6	0.46	0.47	0.44	0.18
550	0.59	0.42	0.47	0.43	--
600	--	--	--	--	--
650	--	--	--	--	--

7.2 CORROSION RESISTANCE

	SS304L	SS316L	SS321		SS304L	SS316L	SS321		SS304L	SS316L	SS321
Acetic anhydride	A	A	A	Barium sulfate	A	A	A	Chloroethane (Ethyl chloride)	A	A	A
Acetone, boiling	A	A	A	Barium sulfide, Saturated solution	A	A	A	Citric Acid			
Acetyl Chloride, boiling	B	B	B	Benzene (Benzol) 20°C or hot	A	A	A	5% still	A	A	A
Acetylene	A	A	A	Benzoic Acid	A	A	A	15% still, 20°C	A	A	A
Acid Salt Mixture	A	A	A	Bitumen	A	A	A	15% boiling	B	A	B
Air	A	A	A	Butane				Creosote (coal tar)	A	A	A
Aluminium acetate, Saturated	A	A	A	-50°C	A	A	A	Creosote oil	A	A	A
Aluminium hydroxide, saturated	A	A	A	20°C	A	A	A	Cyanogen gas	A	A	A
Ammonium bromide	B	A	B	Butyl Acid 5%	A	A	A	Developing Solution	A	A	A
Ammonium bicarbonate, hot	A	A	A	Calcium carbonate	A	A	A	Diethyl ether	A	A	A
Ammonium carbonate, 1% & 5%	A	A	A	Calcium chlorate, dilute solution	A	A	A	Disodium tetraborate (Borax), 5%	A	A	A
Ammonium monophosphate	A	A	A	Calcium chlorite, dilute or concentrate solution	B	A	B	Distillery Wort	A	A	A
Ammonium oxalate 5%	A	A	A	Calcium hypochlorite, 2%	B	A	B	Dyewood Liquor	A	A	A
Ammonium perchlorate 10% boiling	A	A	A	Calcium hydroxide 10% to 20%	A	A	A	Ethylene glycol	A	A	A
Ammonium sulfite, 20°Boiling	A	A	A	Calcium sulfate, satured	A	A	A	Ethanol (Ethyl Alcohol 20°C & boiling)	A	A	A
Ammonia (anhydrous)				Carbonated Water	A	A	A	Ethyl acetate, Concentrated solution	A	A	A
All concentrations	A	A	A	Cellulose	A	A	A	Ethylene chloride	A	A	A
Hot Gas	C	C	C	Chloracetic Acid	C	C	C	Fluorine (gas) moist	C	C	C
Amyl acetate, Concentrate	A	A	A	Chlorine Gas				Fluorosilicic (Hydrofluosilicid Acid)	C	C	C
Amyl chloride	A	A	A	Dry	C	C	C	Formaldehyde, 40% solution	A	A	A
Aniline				Moist	C	C	C	Fuel Oil	A	A	A
3%	A	A	A	Chlorinated Water, Saturated	A	A	A	Gelatin	A	A	A
Concentrated Crude	A	A	A	Chloroform	A	A	A	Glue			
Argon (refrigerated liquid)	A	A	A	Chromium (VI) Acid (Chromic Acid)				Dry	A	A	A
Barium carbonate	A	A	A	5% CP	A	A	A	Solution	B	A	B
Barium chloride, 5% saturated	A	A	A	10%	C	B	C	Glycerol (Glycerine)	A	A	A
Barium nitrate, Aqueous solution hot	A	A	A	Chromium Plating Bath	A	A	A	Hydrochloric Acid, all concentrations	C	C	C

Note: A-Recommended, B-Partially resist, C-Not Recommended

7.2 CORROSION RESISTANCE


	SS304L	SS316L	SS321		SS304L	SS316L	SS321		SS304L	SS316L	SS321
Hydrocyanic Acid	A	A	A	Oxalic Acid				Sodium hydroxide	A	A	A
Hydrofluoric Acid	C	C	C	5%, 10% 20°C	A	A	A	Sodium hypochlorite	C	C	C
Hydrogen peroxide				10% boiling	C	C	C	Sodium nitrate	A	A	A
20°C	B	A	B	25%, 50% boiling	C	C	C	Sodium perchlorate, 10%	A	A	A
Boiling	B	A	B	Paraffin Hot	A	A	A	Sodium phosphate	A	A	A
Lead diacetate (Lead acetate) 5%	A	A	A	Petrol	A	A	A	Steam	A	A	A
Linseed Oil	A	A	A	Petroleum Ether	A	A	A	Stearic Acid	A	A	A
Maliceacid	B	A	B	Phenol	A	A	A	Strontium hydroxide	A	A	A
Mash	A	A	A	Picric Acid	A	A	A	Strontium nitrate solution	A	A	A
Mercury	A	A	A	Potassium bromide	B	A	B	Sulfur			
Methane (refrigerated liquid)	A	A	A	Pottasium hypochlorite	B	B	B	Moist	B	A	B
Methanol (Methyl Alcohol) boiling	C	B	C	Potassium permanganate, 5%	A	A	A	Molten	A	A	A
Mixed Acids, 53% H ₂ SO ₄	A	A	A	Potassium sulfite (salt)	A	A	A	Sulfur Chloride dry	C	C	C
Molasses	A	A	A	Propane				Sulfur dioxide gas			
Mustard	A	A	A	-50°C	A	A	A	Moist	B	A	B
Nephtha				20°C	A	A	A	Dry	A	A	A
Crude	A	A	A	Pyrogallol (Pyrogalllic Acid)	A	A	A	Tanning Liquor	A	A	A
Pure	A	A	A	Quinine bisulfate, dry	B	A	B	Tar	A	A	A
Naphthalene Sulfonic Acid	A	A	A	Quinine sulfate, dry	A	A	A	Trichloroacetic Acid	C	C	C
Nickel chloride solution	A	A	A	Resin	A	A	A	Varnish	A	A	A
Nickel sulfate	A	A	A	Sea Water	B	C	B	Vegetable Juice	A	A	A
Nitre Cake	B	A	B	Silver bromide	B	A	B	Vinegar Fumes	B	A	B
Nitrogen (refrigerated liquid)	A	A	A	Silver nitrate	A	A	A	Vinegar, still agitated or aerated	A	A	A
Nitrous Acid, 5%	A	A	A	Soap	A	A	A	Whisky	A	A	A
Oil, Crude	A	A	A	Sodium acetate, moist	A	A	A	Wine, all phases of Processing & storing	A	A	A
Oil - vegetable, mineral	A	A	A	Sodium carbonate				Water potable	A	A	A
Oleic Acid	A	A	A	5%, 66°C	A	A	A	Yeast	A	A	A
Oxygen (refrigerated liquid)	A	A	A	5%, 50% boiling	A	A	A	Zinc nitrate solution	A	A	A

Note: A-Recommended, B-Partially resist, C-Not Recommended

7.3 PRESSURE DROP CHART

Pressure drop mainly depends on temperatures, surface conditions, and hose configurations. Commonly, when the temperature rises, pressure drop will increase.

Chart Indicating the Approximate Pressure Drop Per Meter Length in Corrugated Hose Corresponding to Flow Rate of Water in Litres Per Minute

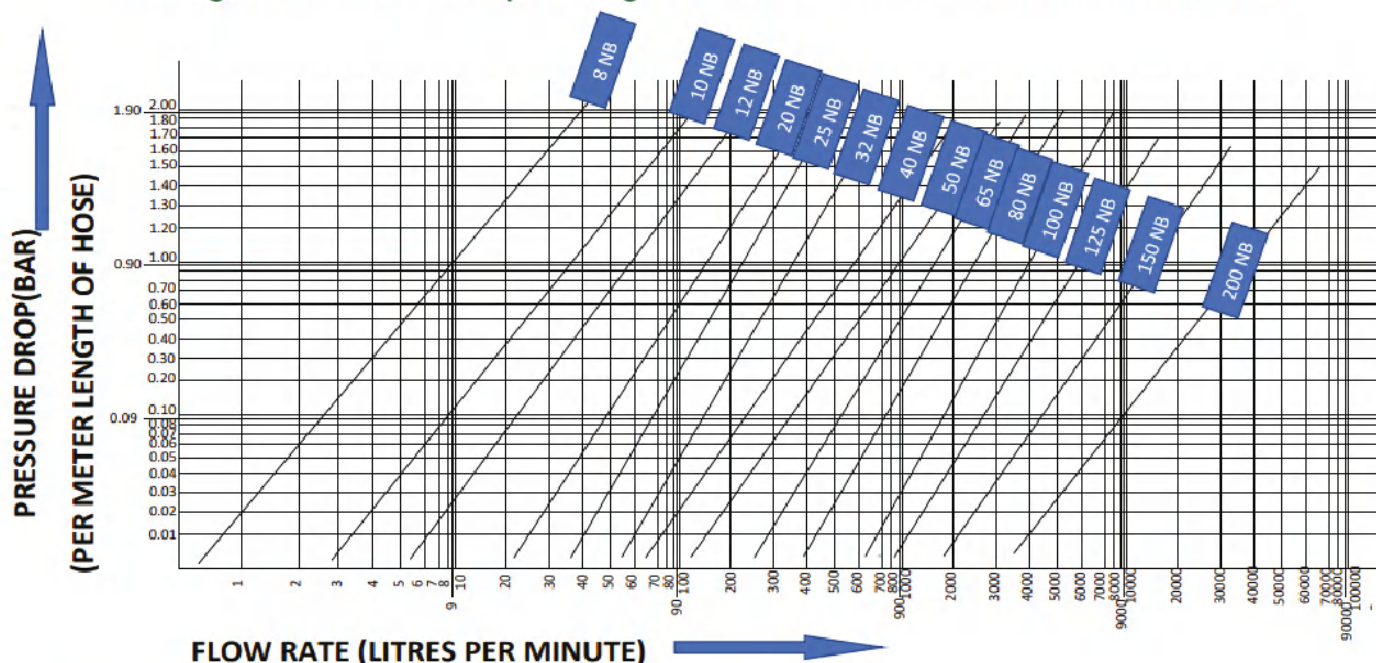

7.4 INSTALLATION CONDITION



Do

Don't



Maintain Bend Radius





Provide Support



Use Double Wrench
Avoid Twisting



Not Allow Hose Movement
in Multiple Direction



7.5 FIND OUT NOMINAL LENGTH OF HOSE

1. Vertically 180° Bend & Vertical Movement

$$NL = 4r + (S/2) + 2L$$

Here

r-Bending radius-mm

e-installation distance-mm


l-length of the connection fitting-mm

h1-max.height of 180°bend

h1-min.height of 180°bend

s-elevation-mm

NL-nominal length-mm

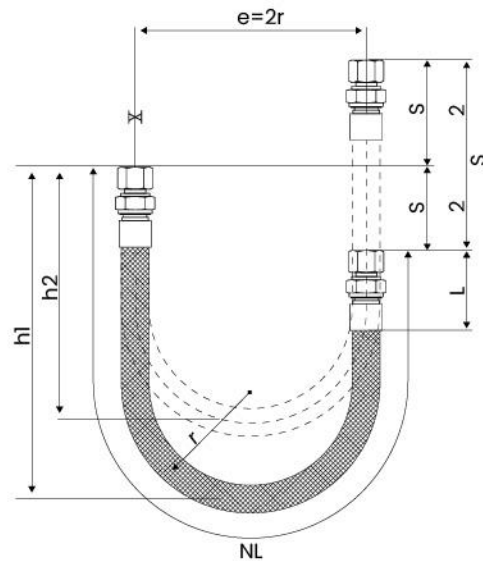

2. Vertically 180° Bend & Horizontal Movement

$$NL = 4r + 1.57 s + 2L$$

Here

r-Bending radius-mm

e-installation distance-mm


l-length of the connection fitting-mm

h1-max.height of 180°bend

h1-min.height of 180°bend

s-elevation-mm

NL-nominal length-mm

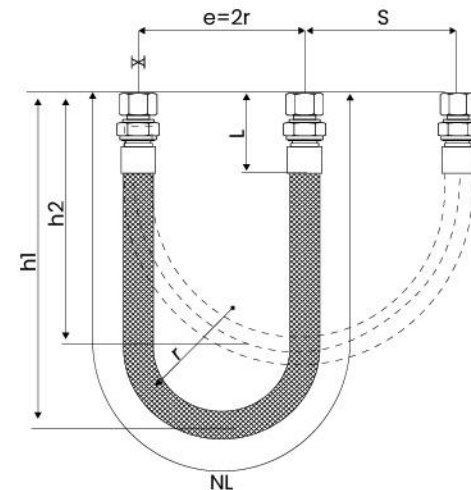

3. Horizontally 180° Bend & Horizontal Movement

$$NL = 4r + 1.57 S_1 + (S_2/2) + 2L$$

Here

r-Bending radius-mm

e-installation distance-mm


l-length of the connection fitting-mm

h1-max.height of 180°bend

h1-min.height of 180°bend

s-elevation-mm

NL-nominal length-mm

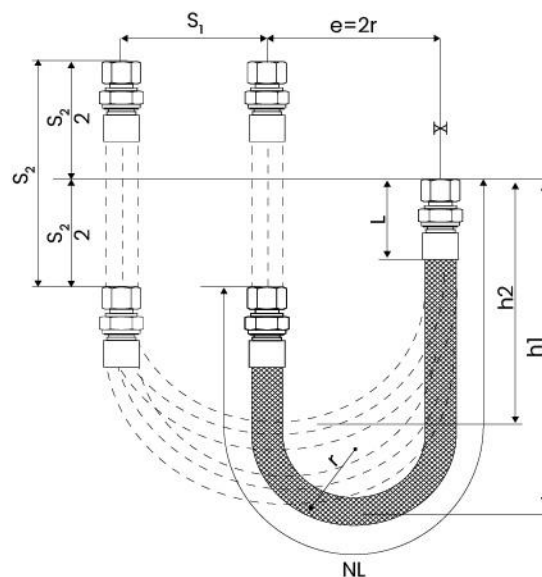

7.6 FLOW VELOCITY

When to use Liners Liquid or Gas applications conveying media at high velocity should use an interlock liner in the hose assembly. This liner will decrease the turbulence caused by the high velocity and reduce the vibration that will occur. A liner is recommended if the velocity is greater than the following:

Conversion Formulas

DEFINITIONS	FEET PER SECOND (FT./SEC.)
gph: gallons per hour	$(\text{gph} \div \text{ID}^2) \times 0.0068$
gpm: gallons per minute	$(\text{gpm} \div \text{ID}^2) \times 0.4083$
cfh: cubic feet per hour	$(\text{cfh} \div \text{ID}^2) \times 0.0509$
cfm: cubic feet per minute	$(\text{cfm} \div \text{ID}^2) \times 3.0558$
cfs: cubic feet per second	$(\text{cfs} \div \text{ID}^2) \times 183.35$

MEDIA	HOSE ALIGNMENT	MAXIMUM VELOCITY NO LINER (FT./SEC.)
Liquid	Straight	70
Liquid	45° bend	55
Liquid	90° bend	35
Gas	Straight	140
Gas	45° bend	110
Gas	90° bend	70

7.7 LIVE HOSE LENGTH BENDING TABLE

CENTERLINE BEND RADIUS IN INCHES	MINIMUM LIVE LENGTH		
	45°	90°	180°
1	1	2	4
2	2	3 1/2	7
3	2 1/2	5	10
4	3 1/2	6 1/2	13
5	4	8	16
6	5	10	20
7	5 1/2	11	22
8	6 1/2	13	26
9	7 1/2	14 1/2	29
10	8	16	32
11	9	18	36
12	10	19 1/2	39
13	10 1/2	21	42
14	11 1/2	22 1/2	45
15	12	24	48
16	13	26	52
17	13 1/2	27	54
18	14 1/2	29	58

CENTERLINE BEND RADIUS IN INCHES	MINIMUM LIVE LENGTH		
	45°	90°	180°
19	15 1/2	30 1/2	61
20	16	32	64
25	20	40	80
30	24	48	95
34	27	54	108
50	40	80	160
55	45	90	180
60	49	97	194
65	53	105	210
70	56	112	224
80	65	130	260
90	73	145	290
100	80	160	320
120	95	190	380
140	112	225	450
160	128	255	510
180	143	285	570
200	160	320	640

Note: Based on hose size, bend radius may vary.

8.1 TERMINOLOGY

Abrasion

External damage to a hose assembly caused by it being rubbed on a foreign object.

Ambient or Atmospheric Conditions

The surrounding conditions, such as temperature, pressure and corrosion, to which a hose assembly is exposed.

Angular Deflection

The displacement that occurs when an assembly is bent into a single curve, expressed as an angle.

Anchor

A restraint applied to a pipeline to control its motion caused by thermal growth.

Annular

Refers to the convolutions on a hose that are a series of complete circles or rings located at right angles to the longitudinal axis of the hose (sometimes referred to as "bellows").

Application

The service conditions that determine how a metal hose assembly will be used.

Armor Guard Or Casing

Flexible interlocked or squarelocked tubing placed over the entire length of a hose or in short lengths at the end of a metal hose, to protect it from physical damage and to limit the bending radius.

Attachment

The method of fixing end fittings to flexible metal hose—welding, brazing, soldering, swaging or mechanical.

Axial Movement

Compression or elongation of the hose along its longitudinal axis.

Basket Weave

A braid pattern in which the strands of wire alternately cross over and under two braid bands (two over – two under).

Beamed Braid

Braid construction where the strands of wire in each carrier are parallel.

Bend Radius

The radius of a bend measured to the hose centerline.

Braid

A flexible wire sheath surrounding a metal hose that prevents the hose from elongation due to internal pressure. Braid is composed of a number of wires wrapped helically around the hose while at the same time going under and over each other in a basket weave fashion.

Braid Angle

The acute angle formed by the braid strands and the axis of the hose.

Braid Sleeve, Braid Band or Ferrule

A ring made from tube or metal strip placed over the ends of a braided hose to contain the braid wires for attachment of fittings.

Braid Wear

Motion between the braid and corrugated hose which normally causes wear on the outside diameter of the corrugation and the inside diameter of the braid.

Braided Braid

In this braid, the strands of wire on each carrier of the braiding machine are braided together, and then braided in normal fashion. Hence the term braided braid.

Brazing

A process of joining metals using a non-ferrous filler metal with a melting point that is lower than the "parent metals" to be joined.

Butt Weld

A process in which the edges or ends of metal sections are butted together and joined by welding.

Controlled Flexing

Controlled flexing occurs when the hose is being flexed regularly, as in connections to moving components.

Examples:

Platen presses, thermal growth in pipe work.

Convolution/Corrugation

The annular or helical flexing member in corrugated or stripwound hose.

Corrosion

The chemical or electro-chemical attack of a media upon a hose assembly.

Cycle Life

The number of cycles completed by an assembly before failure.

Cycle-Motion

The movement from normal to extreme position and return.

Developed Length/Overall Length

The length of a hose, plus fittings required to meet the conditions of a specific application.

Diamond Weave

A braid pattern in which the strands alternately cross over one and under one of the strands (one over – one under). Also known as plain weave.

Dye Penetrant Inspection or Test

A method for detecting surface irregularities, such as cracks, voids, porosity, etc. The surface to be checked is coated with a red dye that will penetrate existing defects.

Dye is removed from surface and a white developer is applied. If there is a defect in the surface being checked, the red dye remaining in it causes the white developer to be stained, thereby locating the defective area.

Displacement

The amount of motion applied to a hose defined as inches for parallel offset and degrees for radial misalignment.

Erosion

The wearing away of the inside or outside convolutions of a hose caused by the flow of the media conveyed, such as wet steam, abrasive particles, etc.

Exposed Length

The amount of active (exposed) hose in an assembly. Does not include the length of fittings and ferrules.

Fatigue

Failure of the metal structure associated with, or due to, the flexing of metal hose or bellows.

Fitting/Coupling

A loose term applied to the nipple, flange, union, etc., attached to the end of a metal hose.

Flow Rate

Pertains to a volume of media being conveyed in a given time period. E.g., cubic feet per hour, pounds per second, gallons per minute, etc.

Frequency

The rate of vibration or flexure of a hose in a given

time period. E.g., cycles per second (CPS), cycles per minute (CPM), cycles per day (CPD), etc.

Helical

Used to describe a type of corrugated hose having one continuous convolution resembling a screw thread.

Helical Wire Armor/Spring Guard

To provide additional protection against abrasion. Metal hoses can be supplied with an external round or oval section wire spiral.

Inside Diameter (I.D.)

The diameter inside the hose corrugation.

Interlocked/Squarelocked Hose

Formed from profiled strip and wound into flexible metal tubing with no subsequent welding, brazing, or soldering. May be made pressure-tight by winding in strands of packing.

Lap Weld (LW)

Type of weld in which the ends or edges of the metal overlap each other and are welded together.

Lateral Offset

The perpendicular distance between parallel fitting axes of an assembly.

Liner

Flexible sleeve used to line the inside diameter of hose when conveying a high-velocity media, also prevents erosion.

Live Length

The amount of active (flexible) length of hose in an assembly. Does not include the length of fittings and ferrules.

Loop Installation

The assembly is installed in a loop or “U” shape and is most often used when frequent and/or large amounts of motion are involved.

Medium, Media

The substance(s) being conveyed through a system.

Nominal Diameter

Indicates the approximate inside diameter.

Offset-Lateral, Parallel

The distance that the ends of a hose assembly are displaced in relation to each other as a result of connecting two misaligned terminations in a system, or intermittent flexure required in a hose application.

Operating Conditions

The pressure, temperature, motion, and environment to which a hose assembly is subjected.

Outside Diameter (O.D.)

The external diameter of a metal hose, measured at the top of the corrugation or braiding.

Percent of Braid Coverage

The percent of the surface area of a hose that is covered by braid.

Pitch

The distance between the two peaks of adjacent corrugations or convolutions.

Ply, Plies

The number of individual thicknesses of metal used in the construction of a wall of the convoluted hose.

Pressure

Usually expressed in pounds per square inch (psi).

Pressure, Burst

Failure of the hose where the braid fails in tensile, or the hose ruptures, or both, due to the internal pressure applied.

Pressure, Deformation

The pressure at which the convolutions of a hose become permanently deformed.

Pressure, Maximum Allowable Working

The maximum pressure at which a hose or hose assembly is designed to be used.

Pressure, Pulsating

A rapid change in pressure above and below the normal base pressure, usually associated with reciprocating type pumps. This pulsating pressure can cause excessive wear between the braid and the tops of the hose convolutions.

Pressure, Shock

A sudden increase of pressure in a hydraulic or pneumatic system which produces a shock wave. This shock can cause severe permanent deformation of the hose corrugations, as well as rapid failure due to metal fatigue.

Pressure, Static

A non-changing, constant pressure.

Pressure, Working

The pressure, usually internal but sometimes

external, imposed on a hose during operating conditions.

Safety Factor

The relationship of working pressure to burst pressure.

Strand(S)

Individual groups of wires in a braid. Each group is supplied from a separate carrier in the braiding machine.

Stress Corrosion

A form of corrosion in stainless steel normally associated with chlorides.

TIG Weld/GTAW

The gas tungsten arc welding process sometimes referred to as a "shielded arc" or "heliarc."

Traveling Loop

A general classification of bending wherein the hose is installed in a U-shaped configuration.

Traveling Loop, Class A Loop

An application wherein the radius remains constant and one end of the hose moves parallel to the other end.

Traveling Loop, Class B Loop

A condition wherein a hose is installed in a U-shaped configuration and the ends move perpendicular to each other so as to enlarge or decrease the width of the loop.

Torque (Torsion)

A force that produces, or tends to produce, rotation of or torsion about the longitudinal axis of a hose assembly while the other end is fixed.

Vacuum

Negative pressure or suction.

Velocity

The speed at which the medium flows through the hose.

Velocity Resonance

The vibration of convolutions due to the buffeting of a high velocity gas or liquid flow.

Vibration

Low-amplitude motion occurring at high frequency.

Welding

The process of localized joining of two or more metallic components by means of heating their surfaces to a state of fusion, or by fusion with the use of additional filler material.



Polyhose®  **TOFLE**

An Indo - Japan Joint Venture

 **Polyhose Tofle Pvt. Ltd.**

Survey No 249/1, Polyhose Green Park - Block C,
Kadambathur Panchayat Union, Nayapakkam, Thiruvallur, Tamil Nadu: 602023



+91 73585 47319



tofle@polyhose.com



www.polyhose.com